

# SRS ECO SIMPLY



# SRS ECO SIMPLY



The aluminium roller shutter model ECO SIMPLY is assembled with profiles H30 or H38, is realized with the required heights in extruded shapes and special characteristics. It can be used for medium compartments, in substitution to troublesome leaf-doors. Usually, the roller shutters are delivered silver anodized or RAL 7035 painted, or on demand painted in different RAL colours. The ECO SIMPLY has a sliding system that permits to make good use of the available space inside the vehicle. When open the shutter will lay flat horizontally under the roof and the eventual surplus length will lay vertically in the rear part. This sliding system is recommended for areas of max. 1m<sup>2</sup>. It is a cheap and easy mounting solution, which anyway maintains the reliability and design standards of all SRS shutters.

**The roller shutter will be delivered divided into parts, which can be easily assembled:**

- 1 pre-assembled shutter complete with closing system with or without key
  - 1 pair of vertical guides
  - 1 pair of curves (entire or separate)
  - 2 eventual sliding extensions, to be put between the curves, when the curves are separate
  - 1 box with accessories
- + **Required optionals**

USEFUL AREA	Weight of roller shutter for 1m <sup>2</sup>
Max. recommended area 1 m <sup>2</sup>	H30 = 13Kg H38 = 11Kg



## CLOSING SYSTEMS



T1 closing system with or without key. As optional it can be supplied with grip profile.



T2 closing system with or without key. As optional it can be supplied with grip profile.






T3 closing system with or without key. It is supplied with grip profile.




T5 (Tribarlock) closing system with or without key. It is supplied with grip profile.



# AVAILABLE GUIDE PROFILES

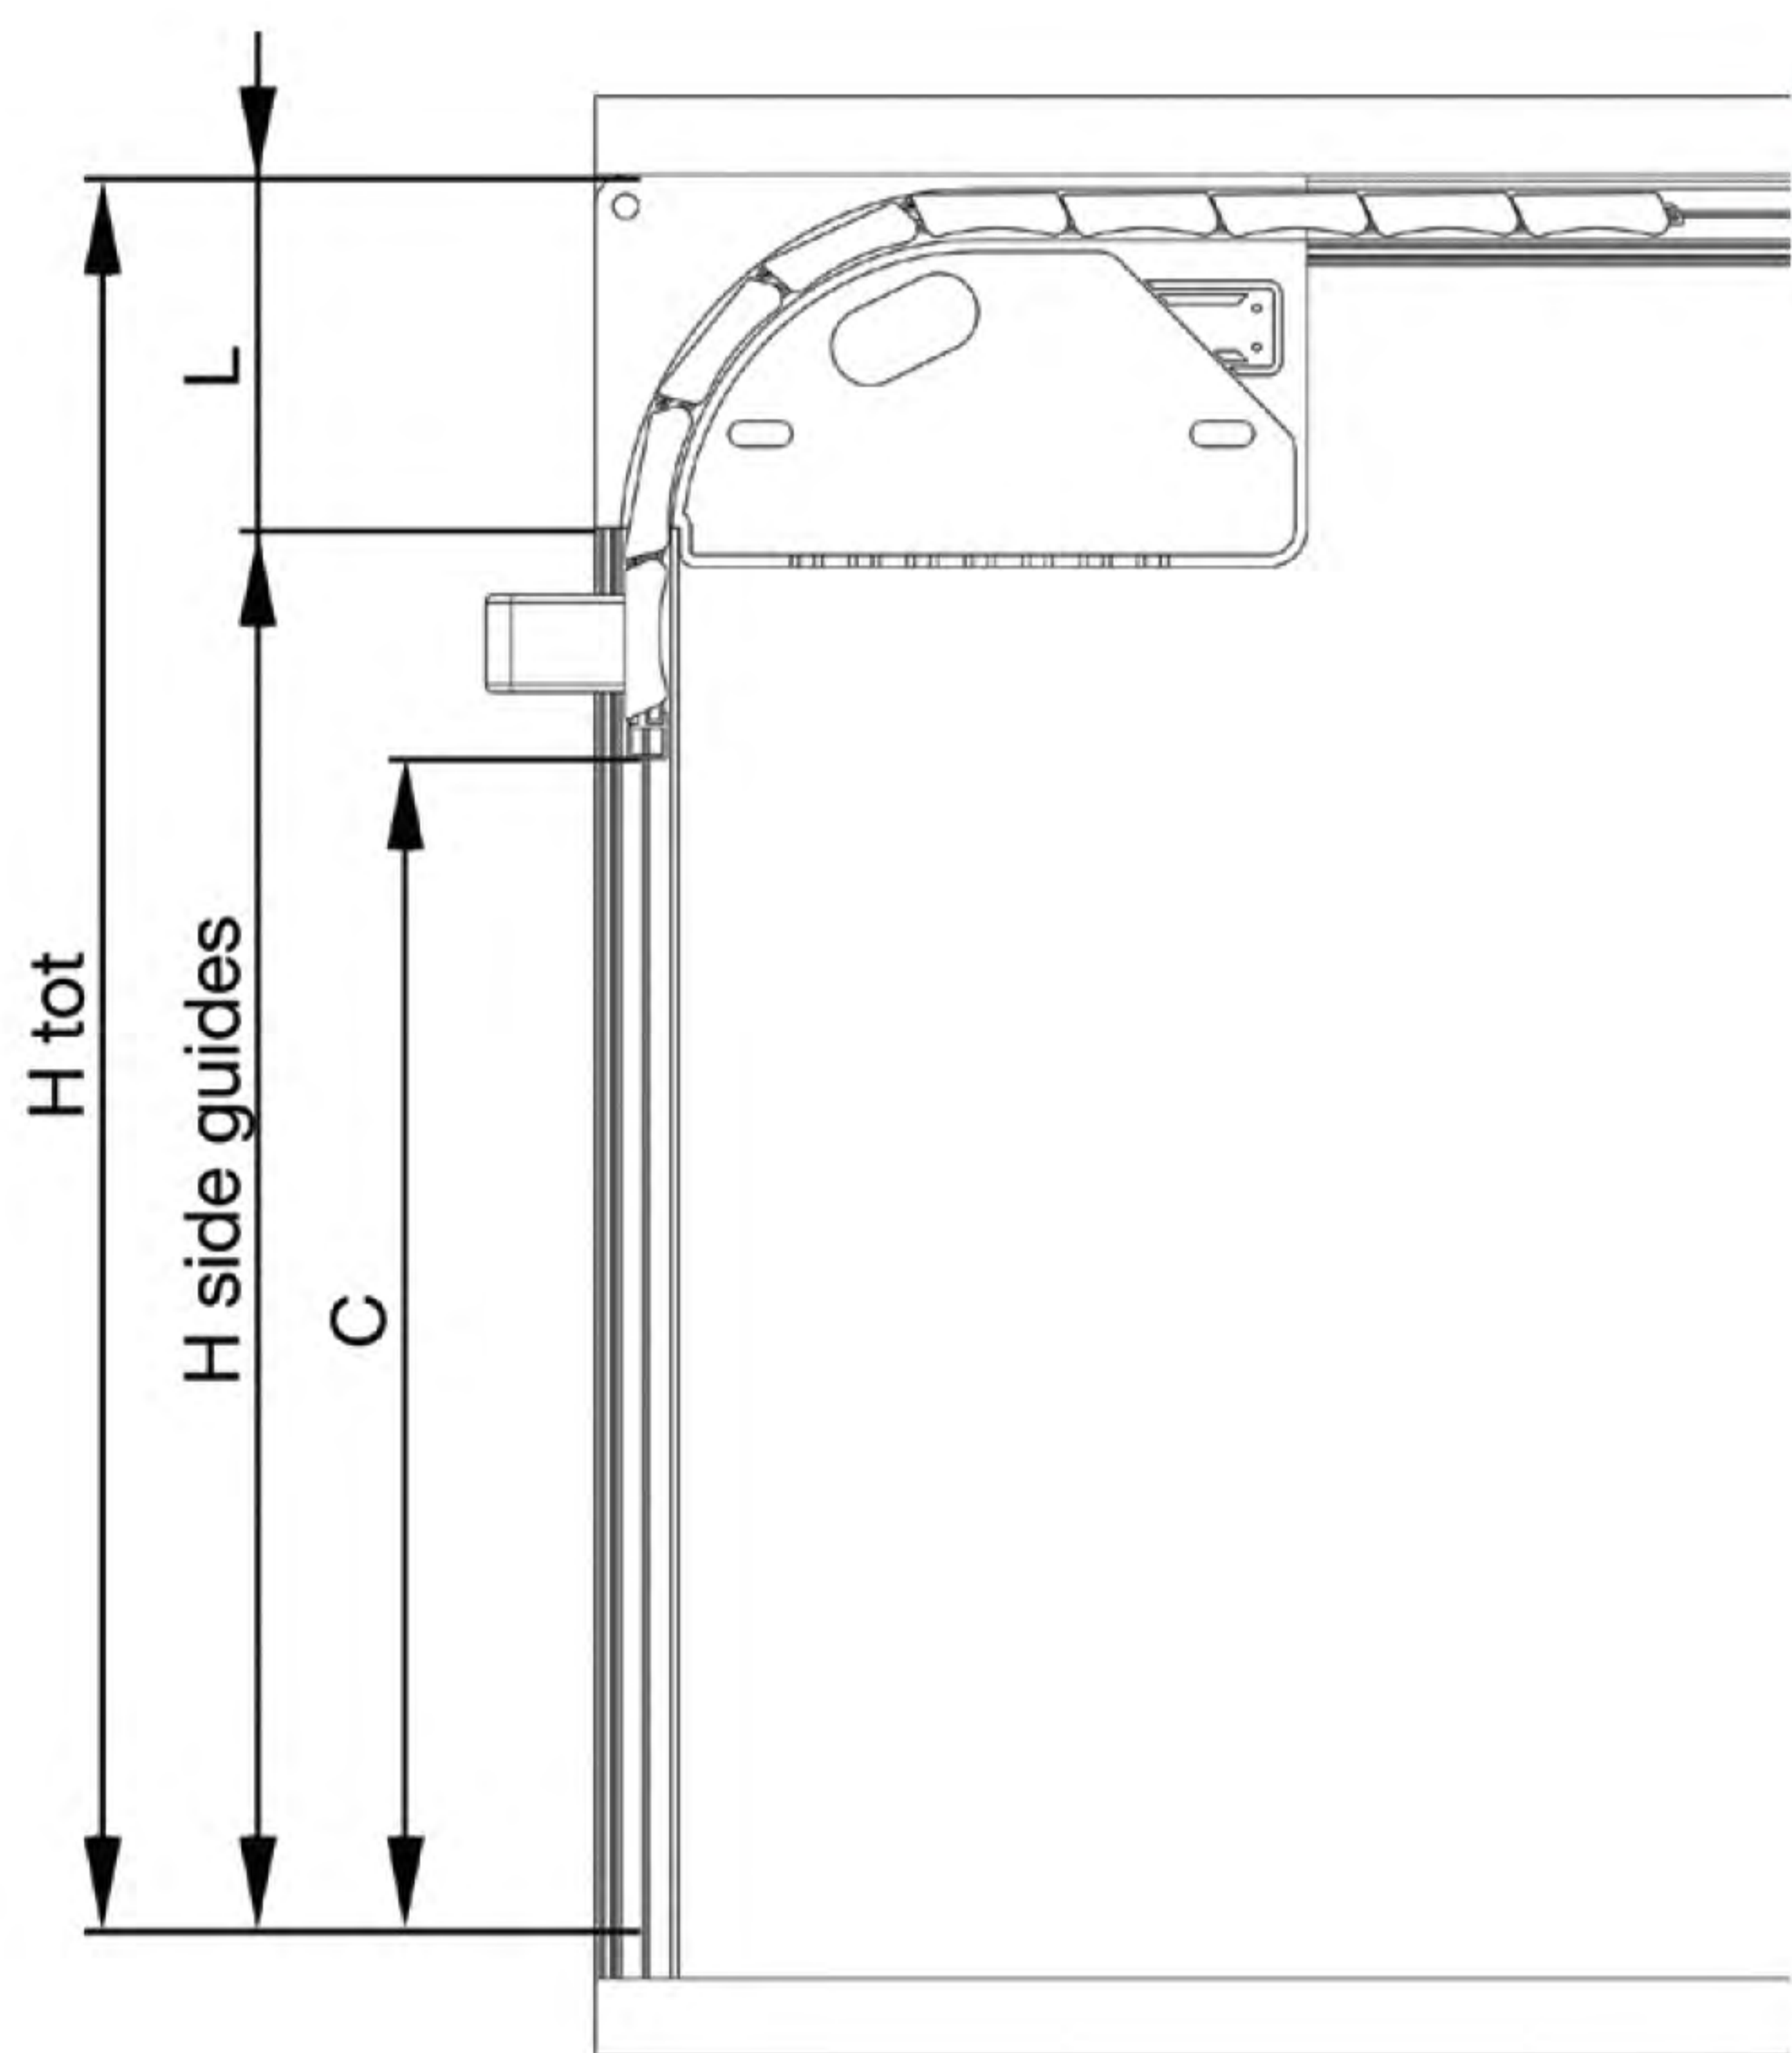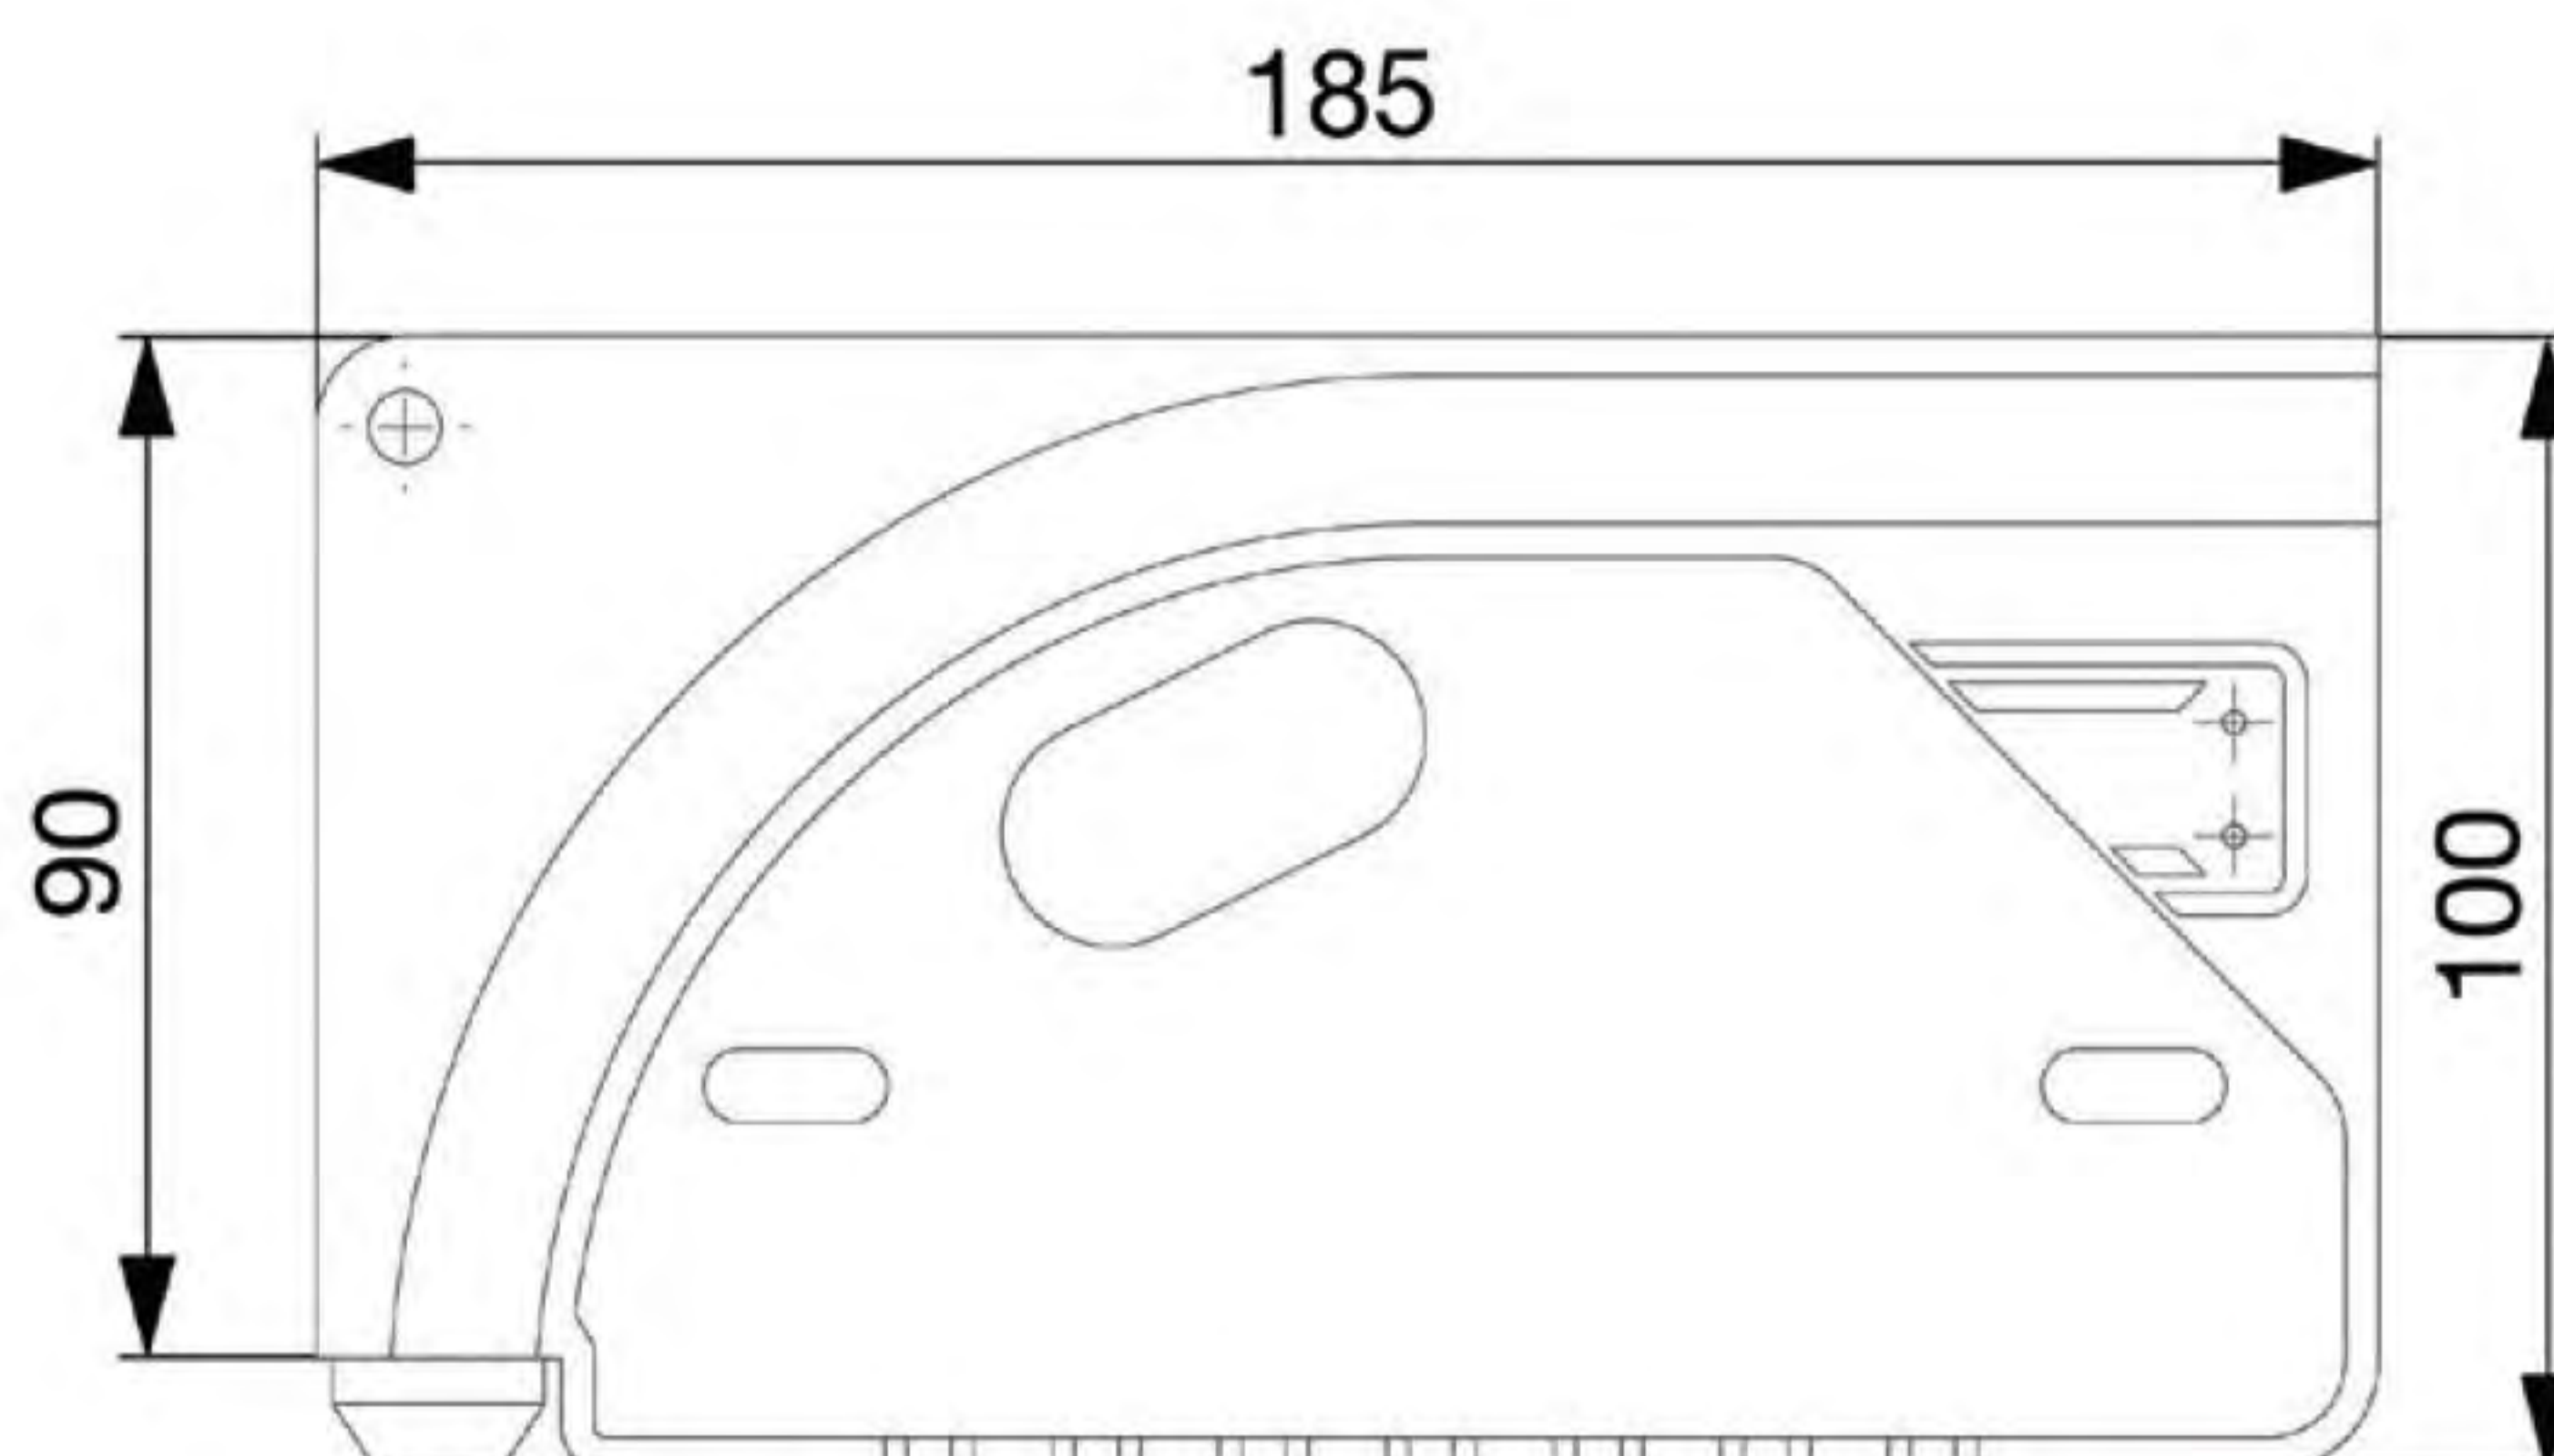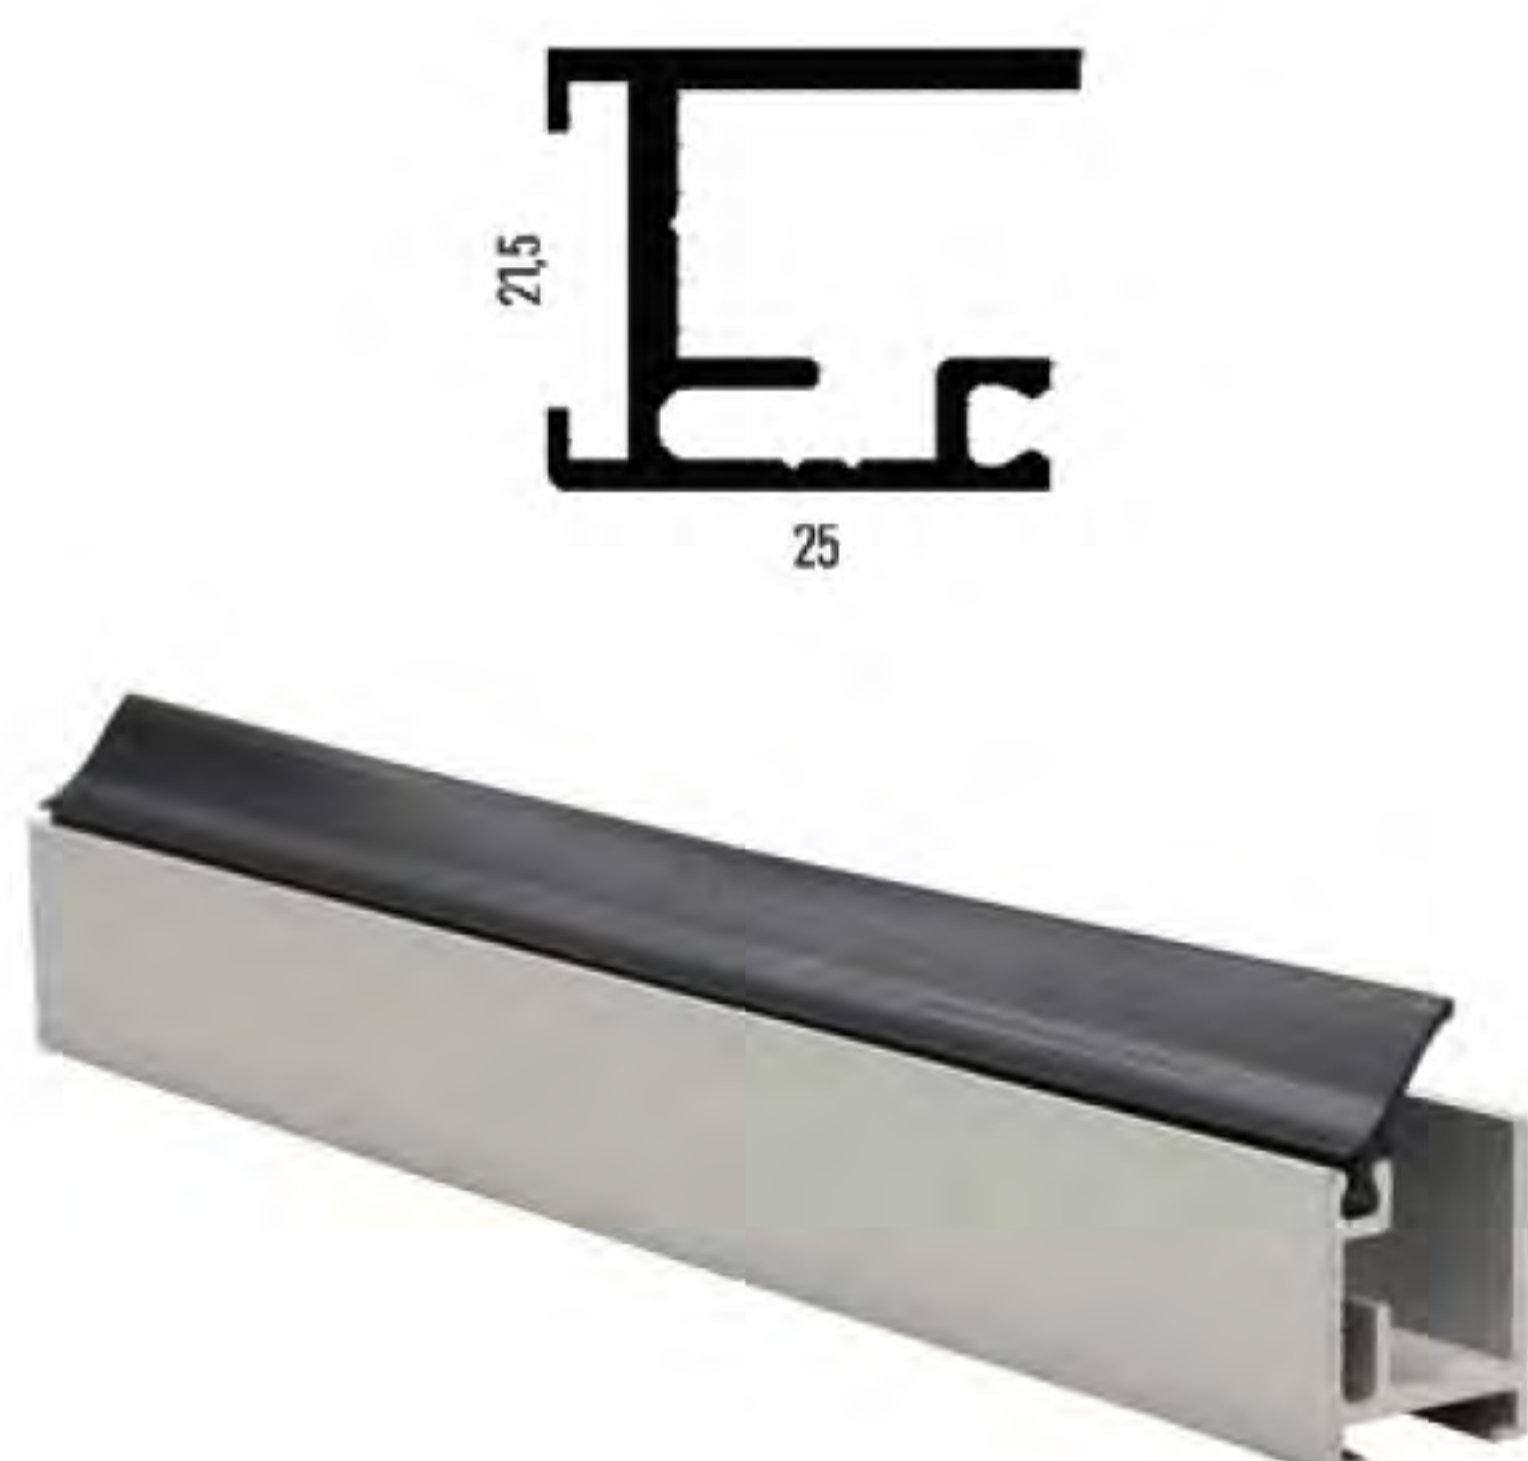

## MEASUREMENTS

H tot	Total height
H guides	Side guides height
L	Sliding room
C	Light height
WU	Light width
WS	Total width
D	Guide and gasket edge

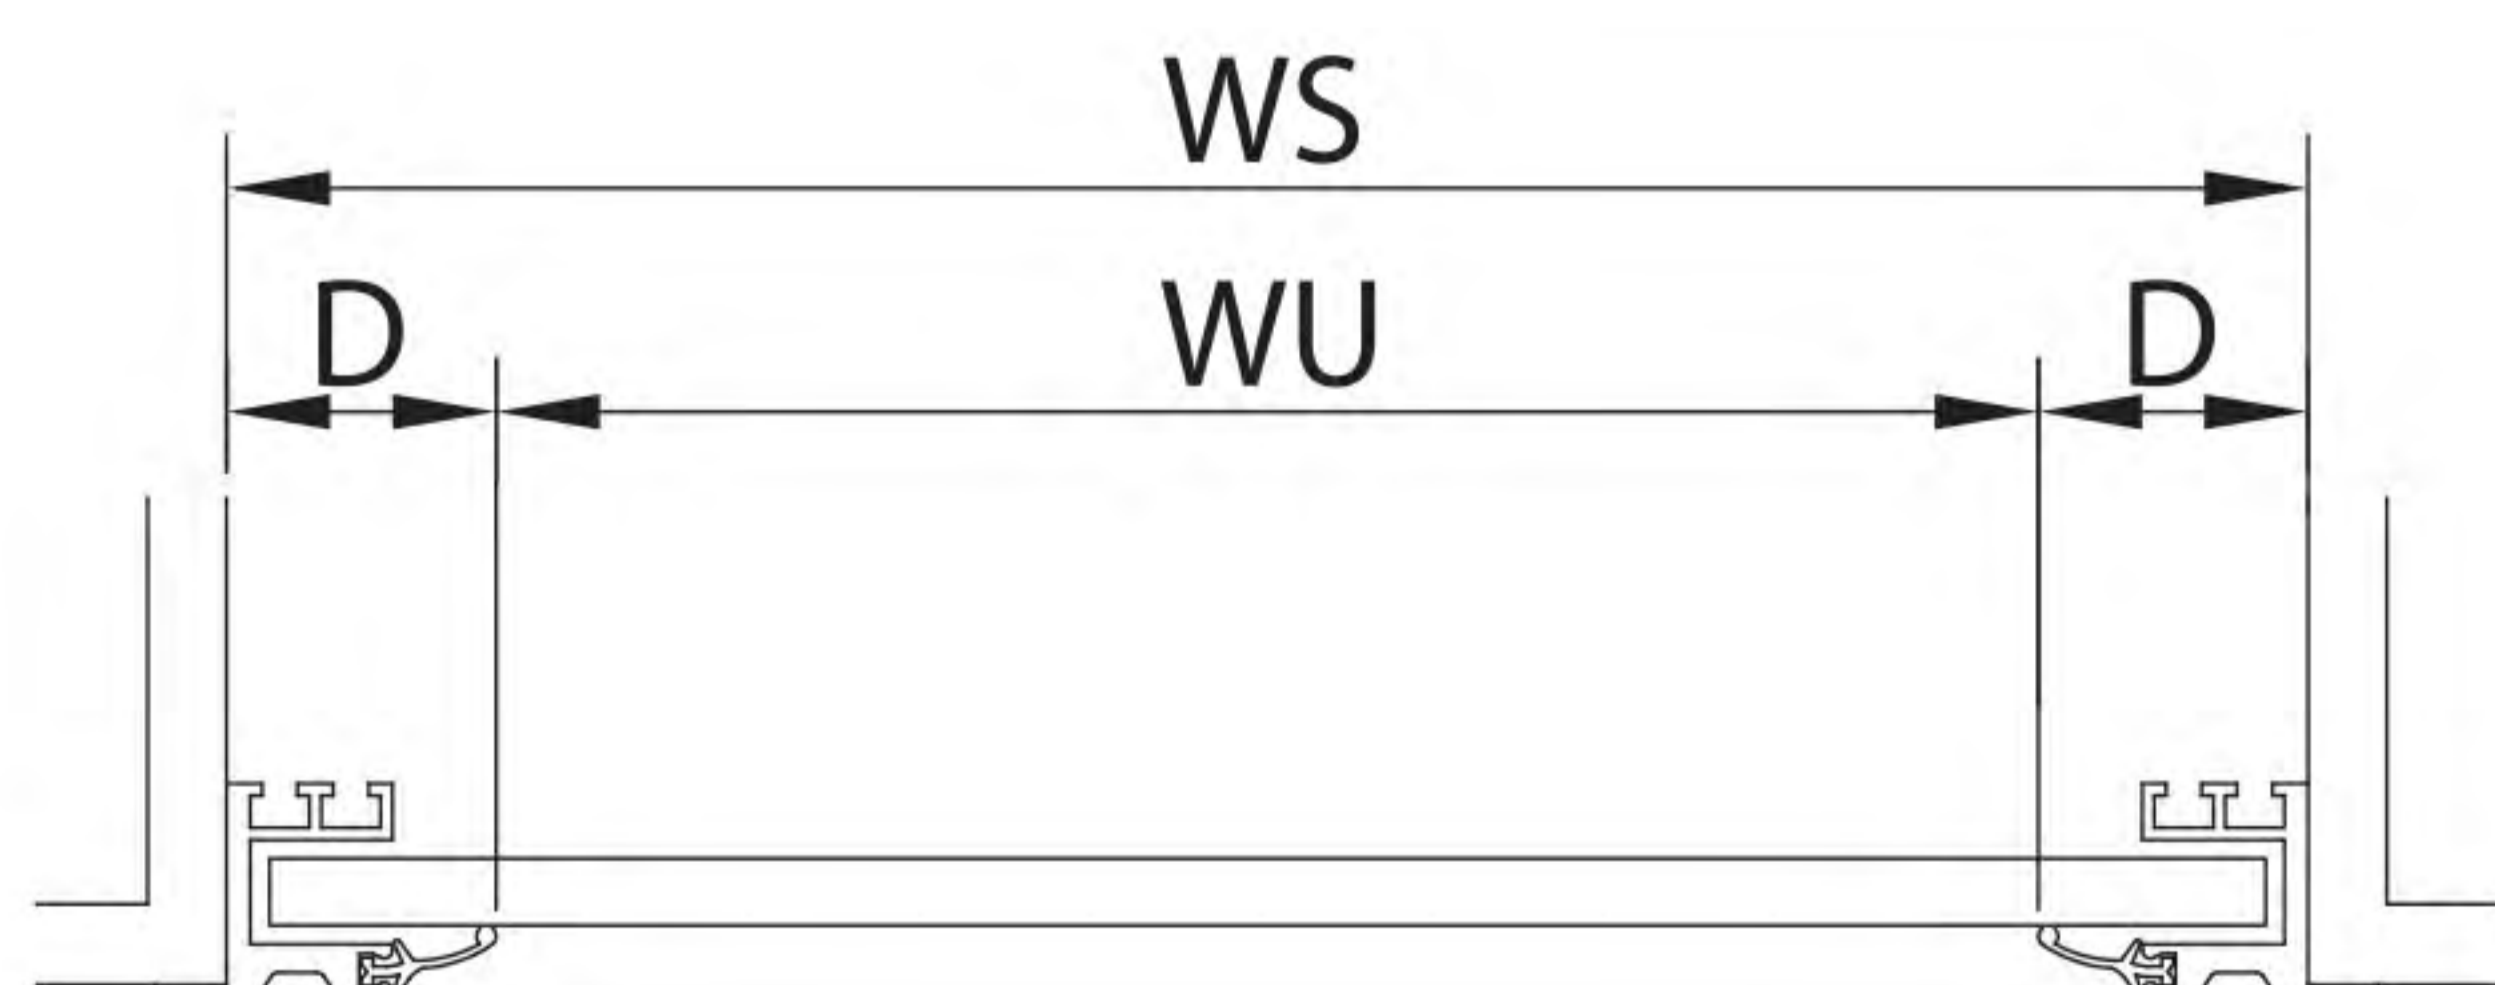


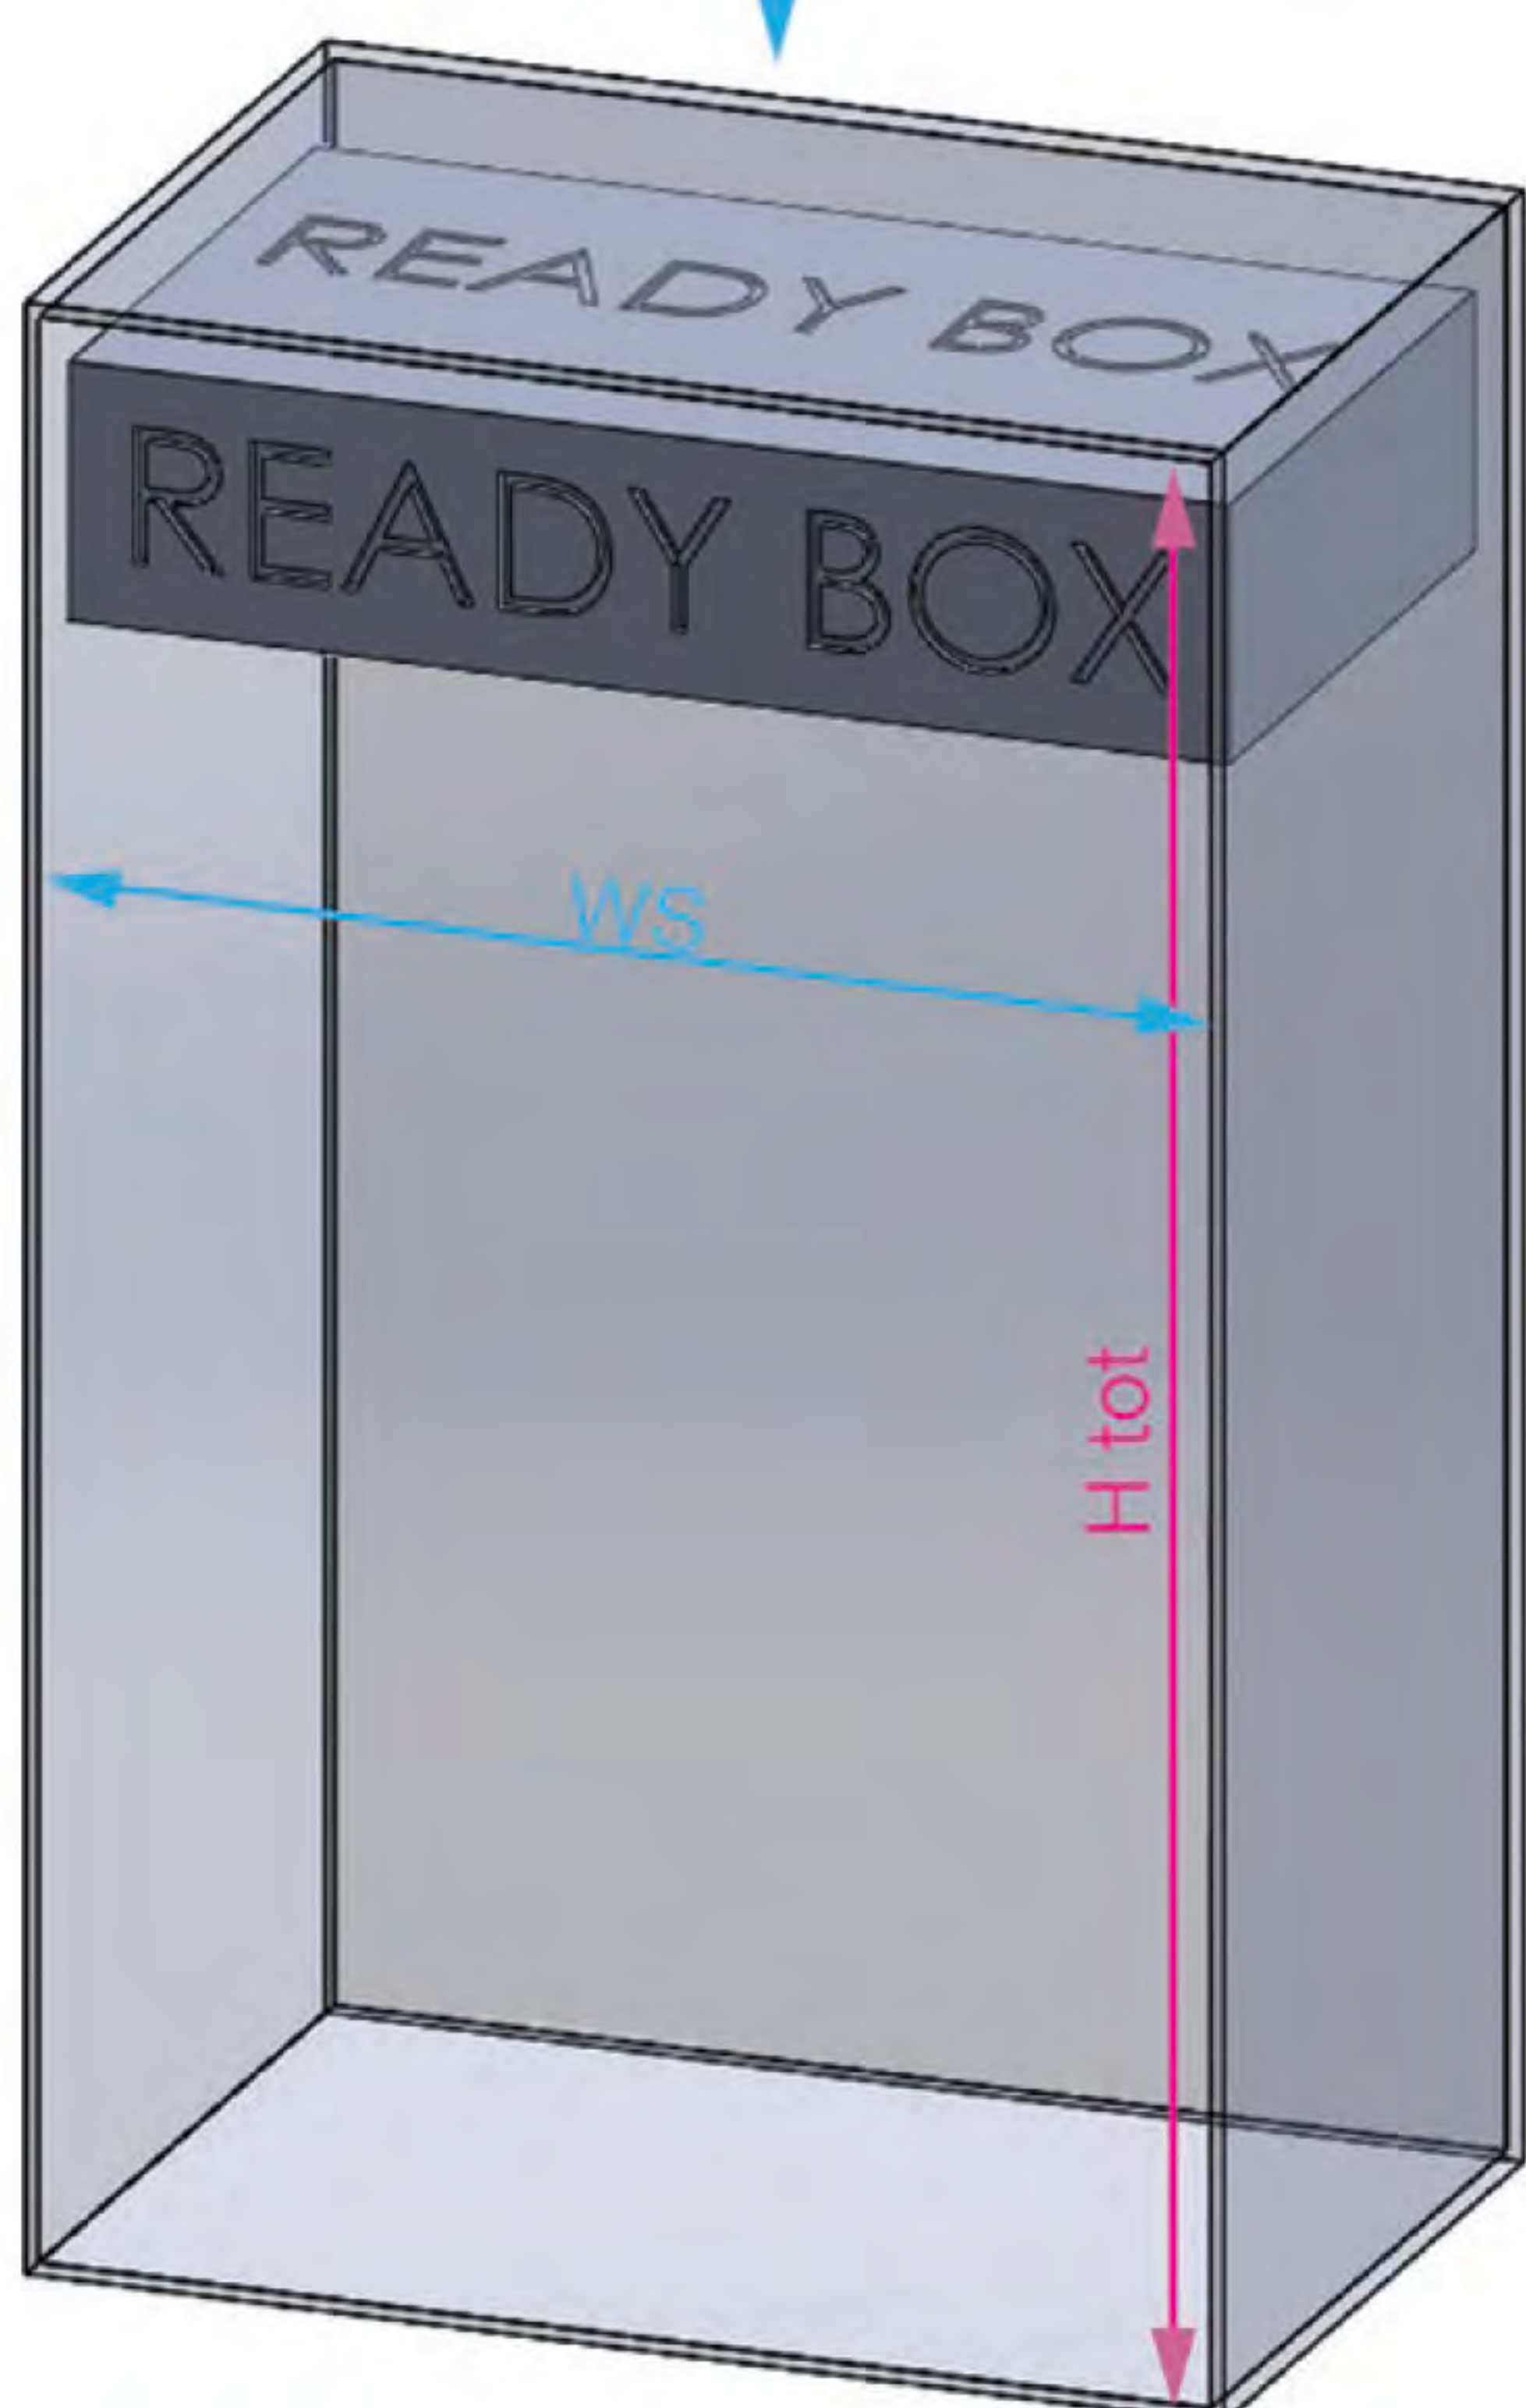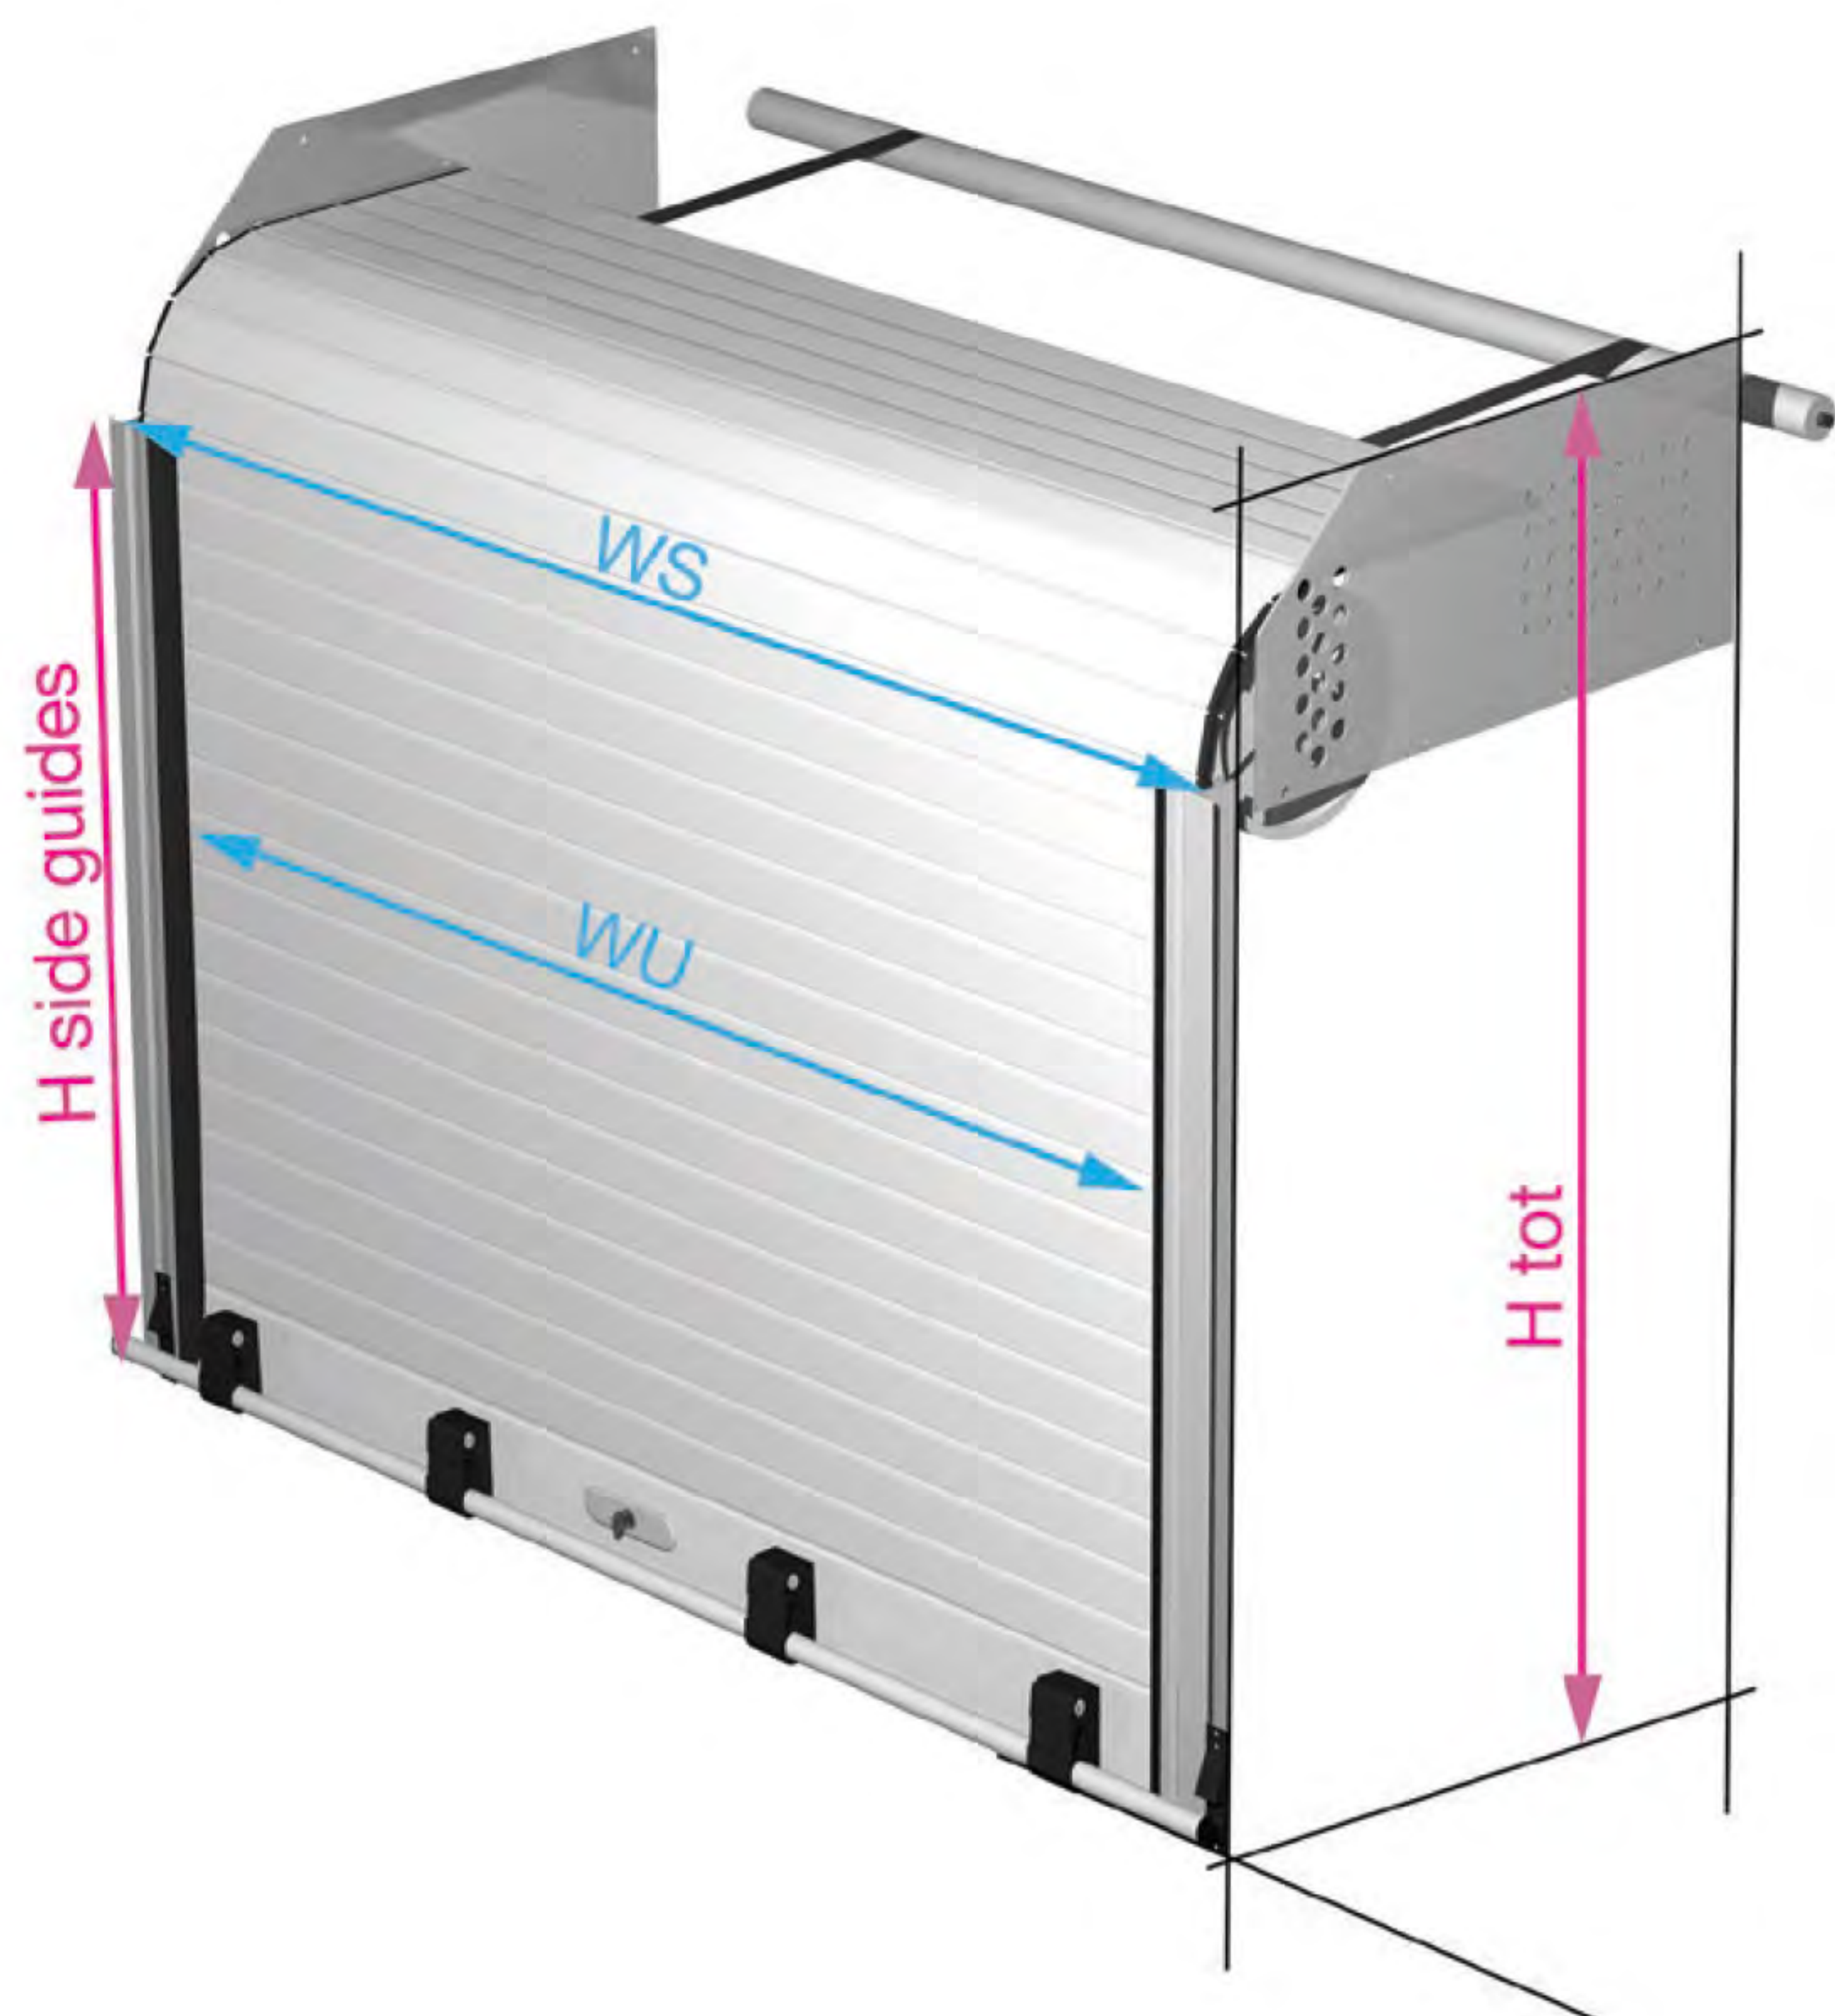


# MEASURING

MEASUREMENTS	
H tot	Total height
H guides	Side guides height
L	Sliding room
C	Light height
WU	Light width
WS	Total width

## SRS TOP READY MP4

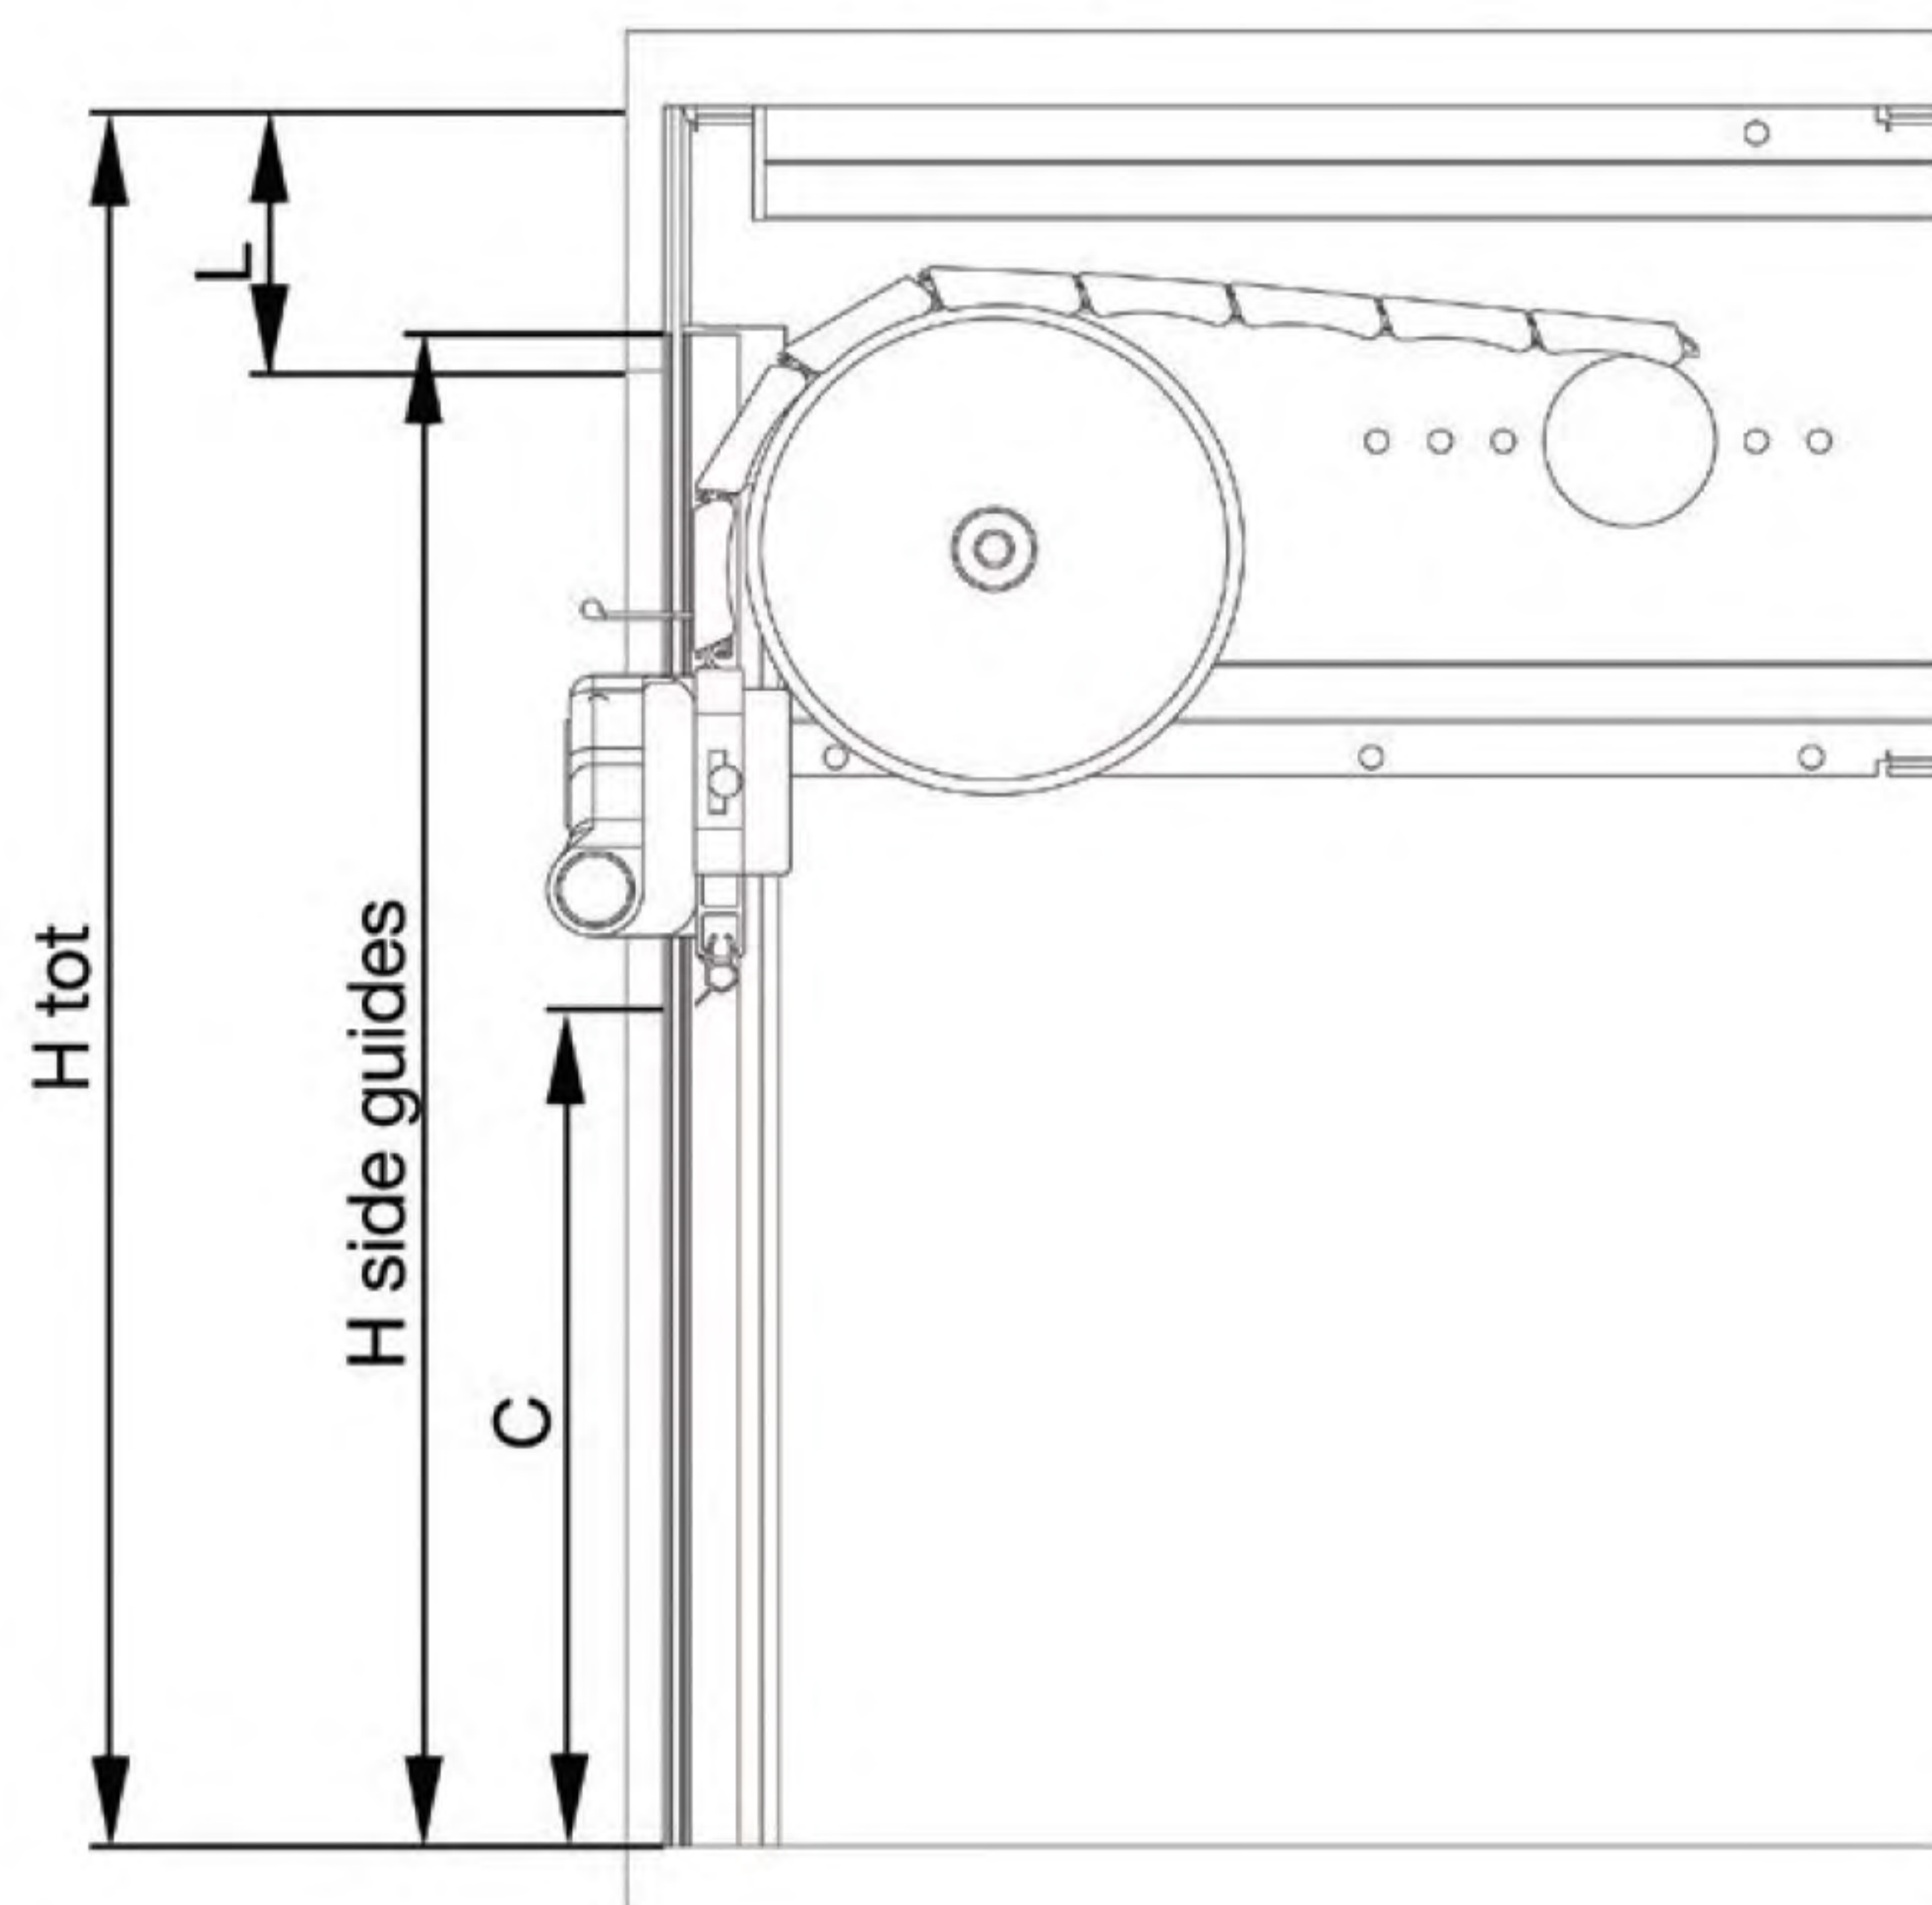

## SRS TOP READY MP5

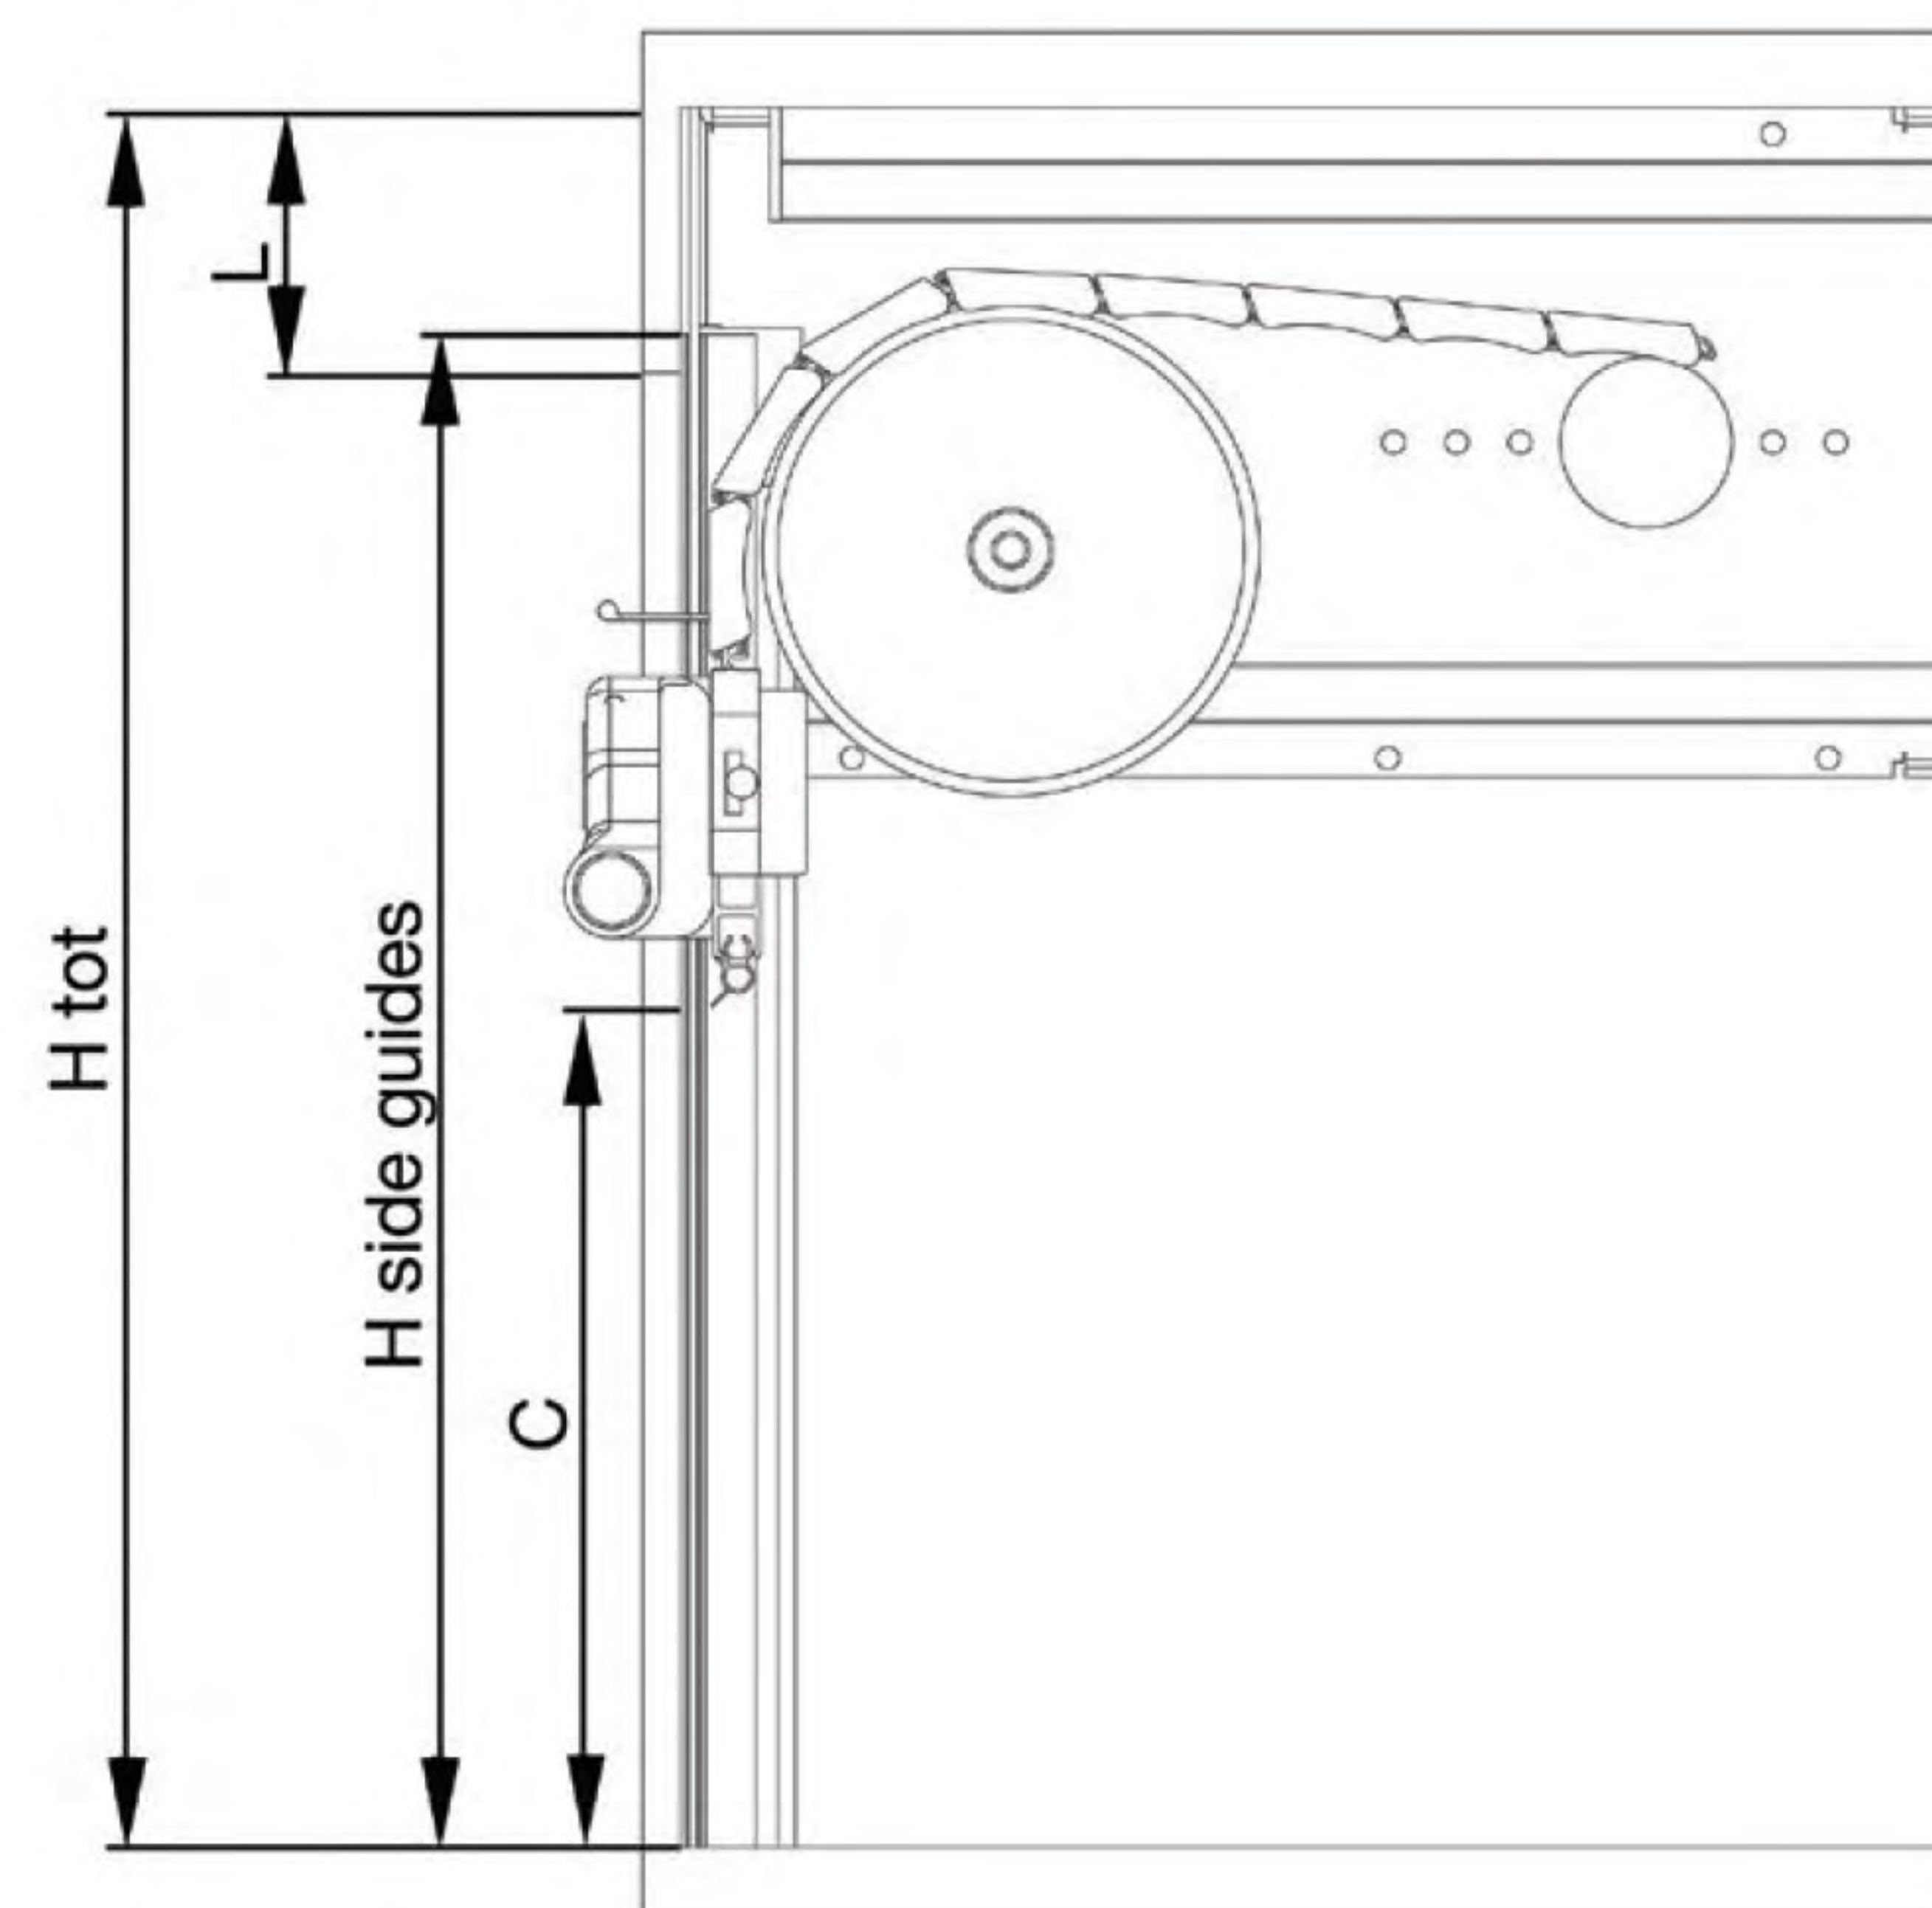


View mounting instruction video MP4




View mounting instruction video MP5


SRS ECO

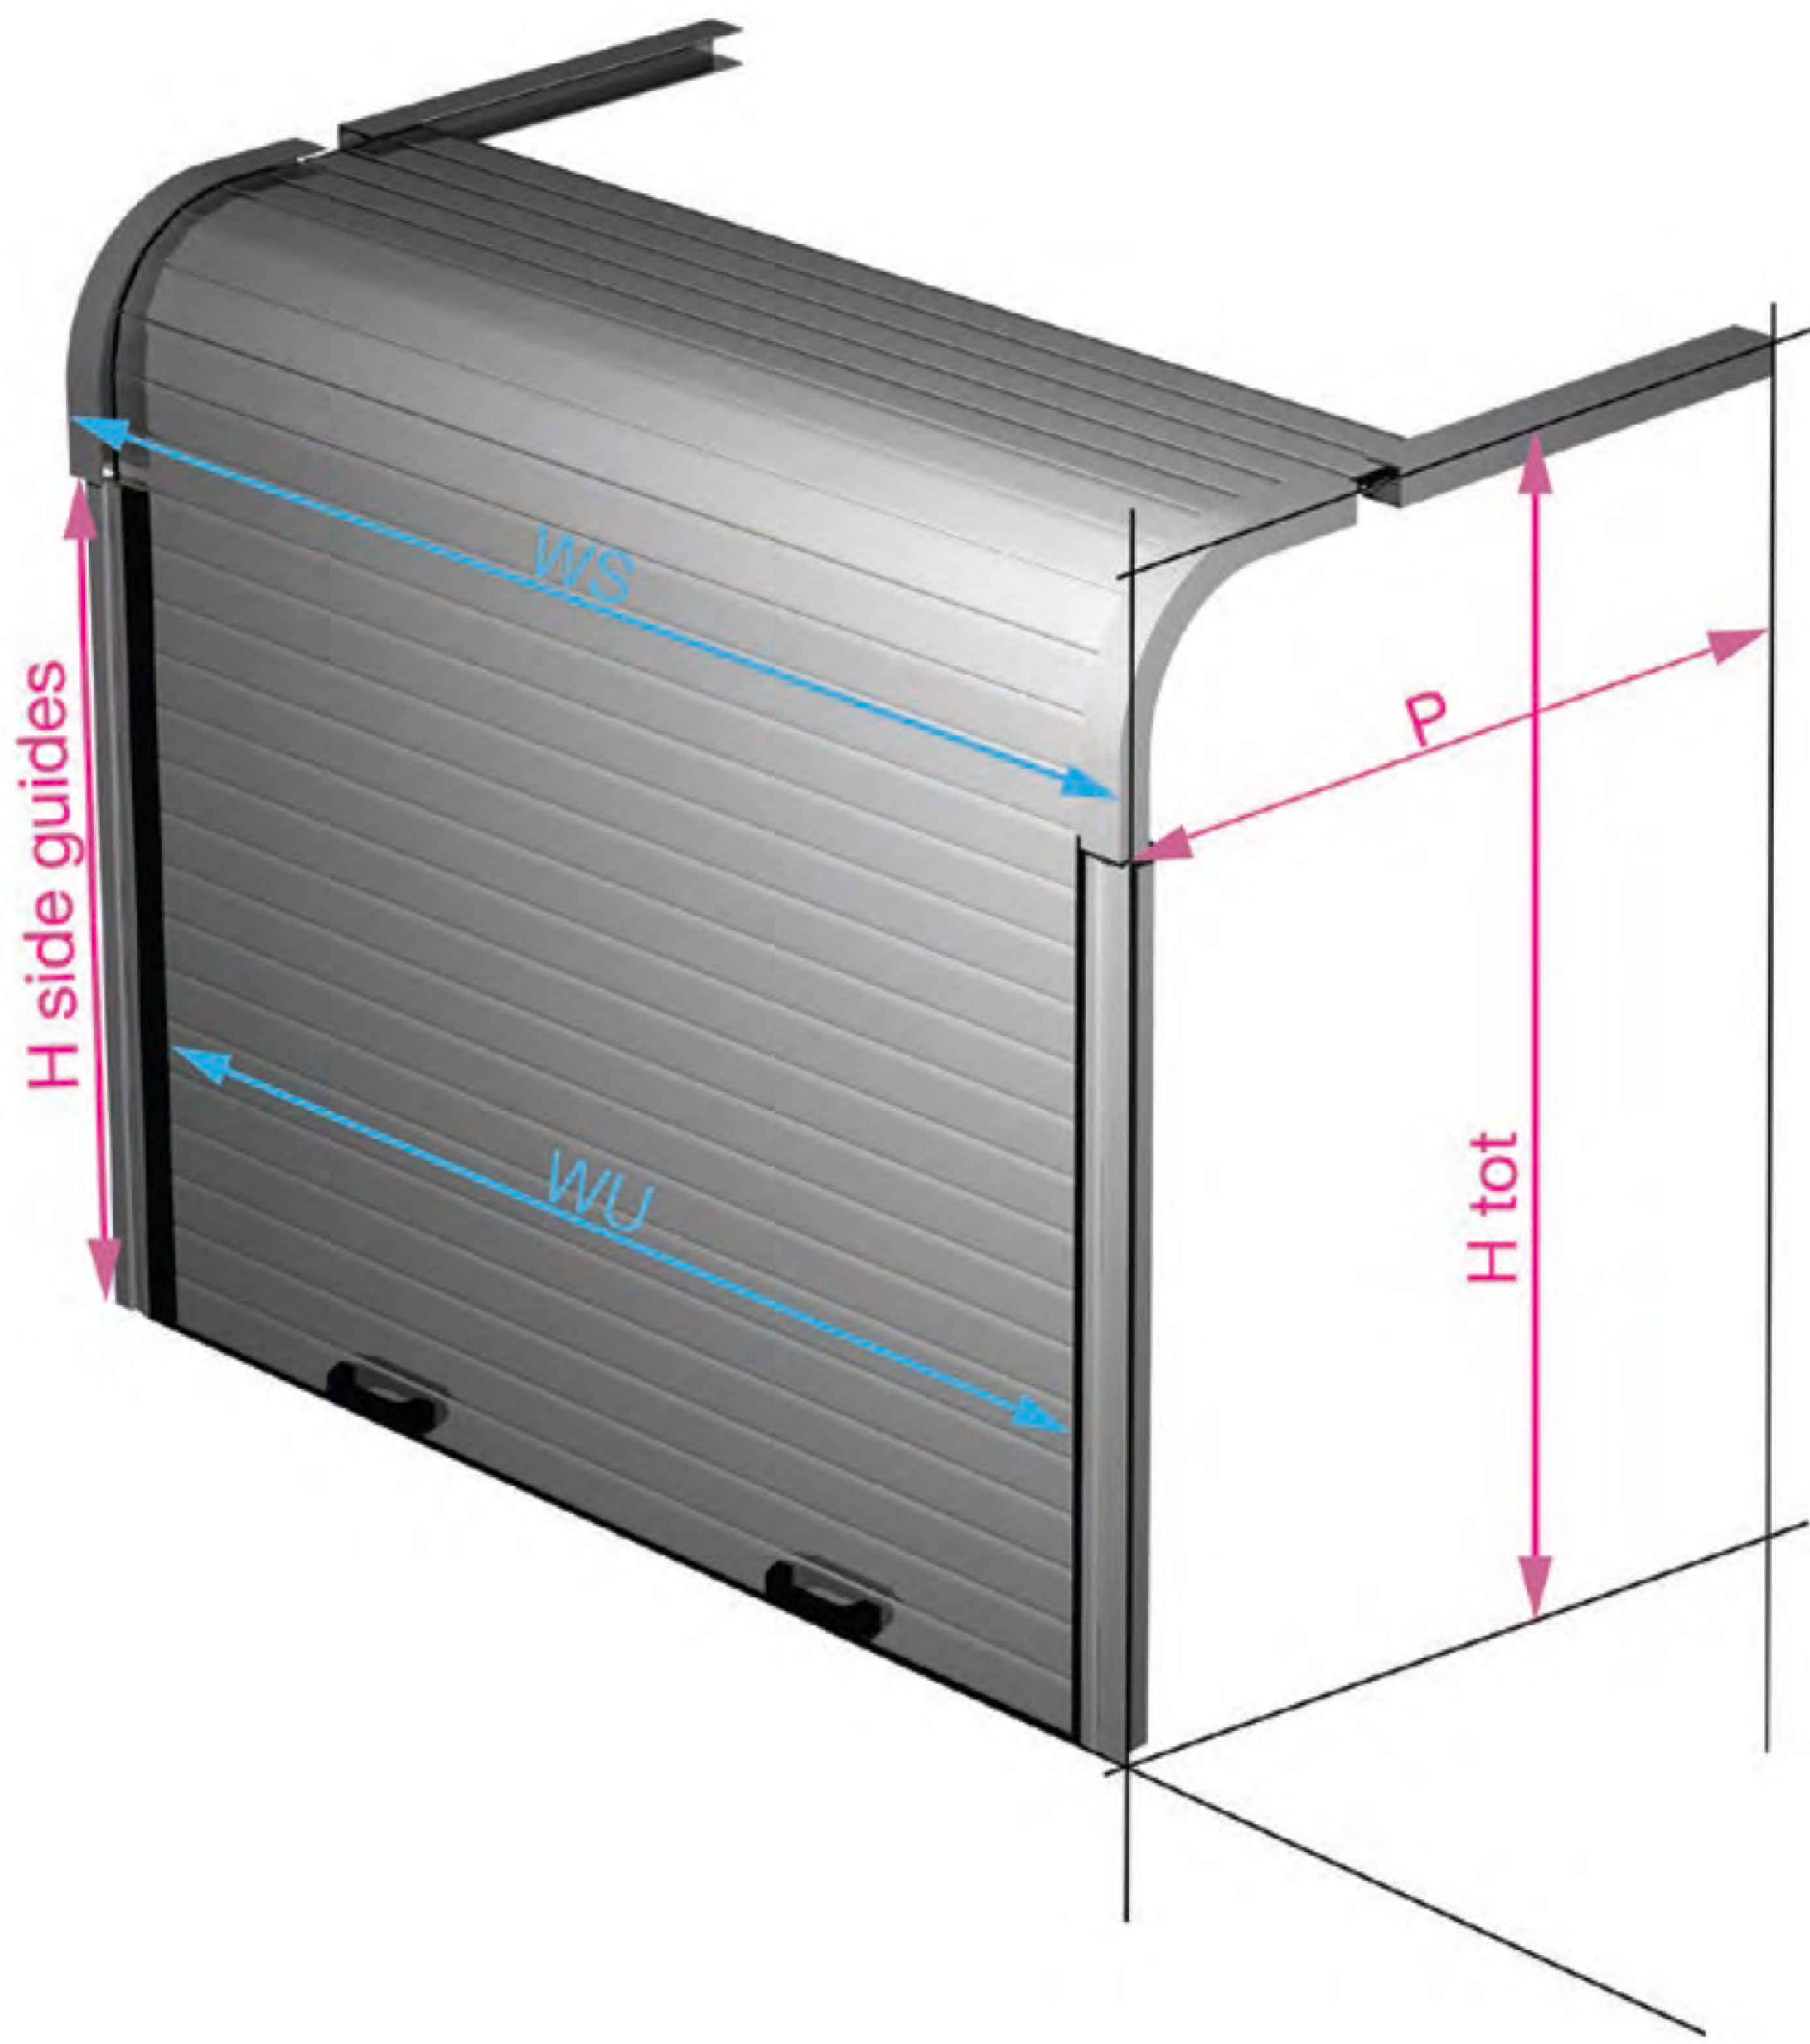



SRS ECO PLUS

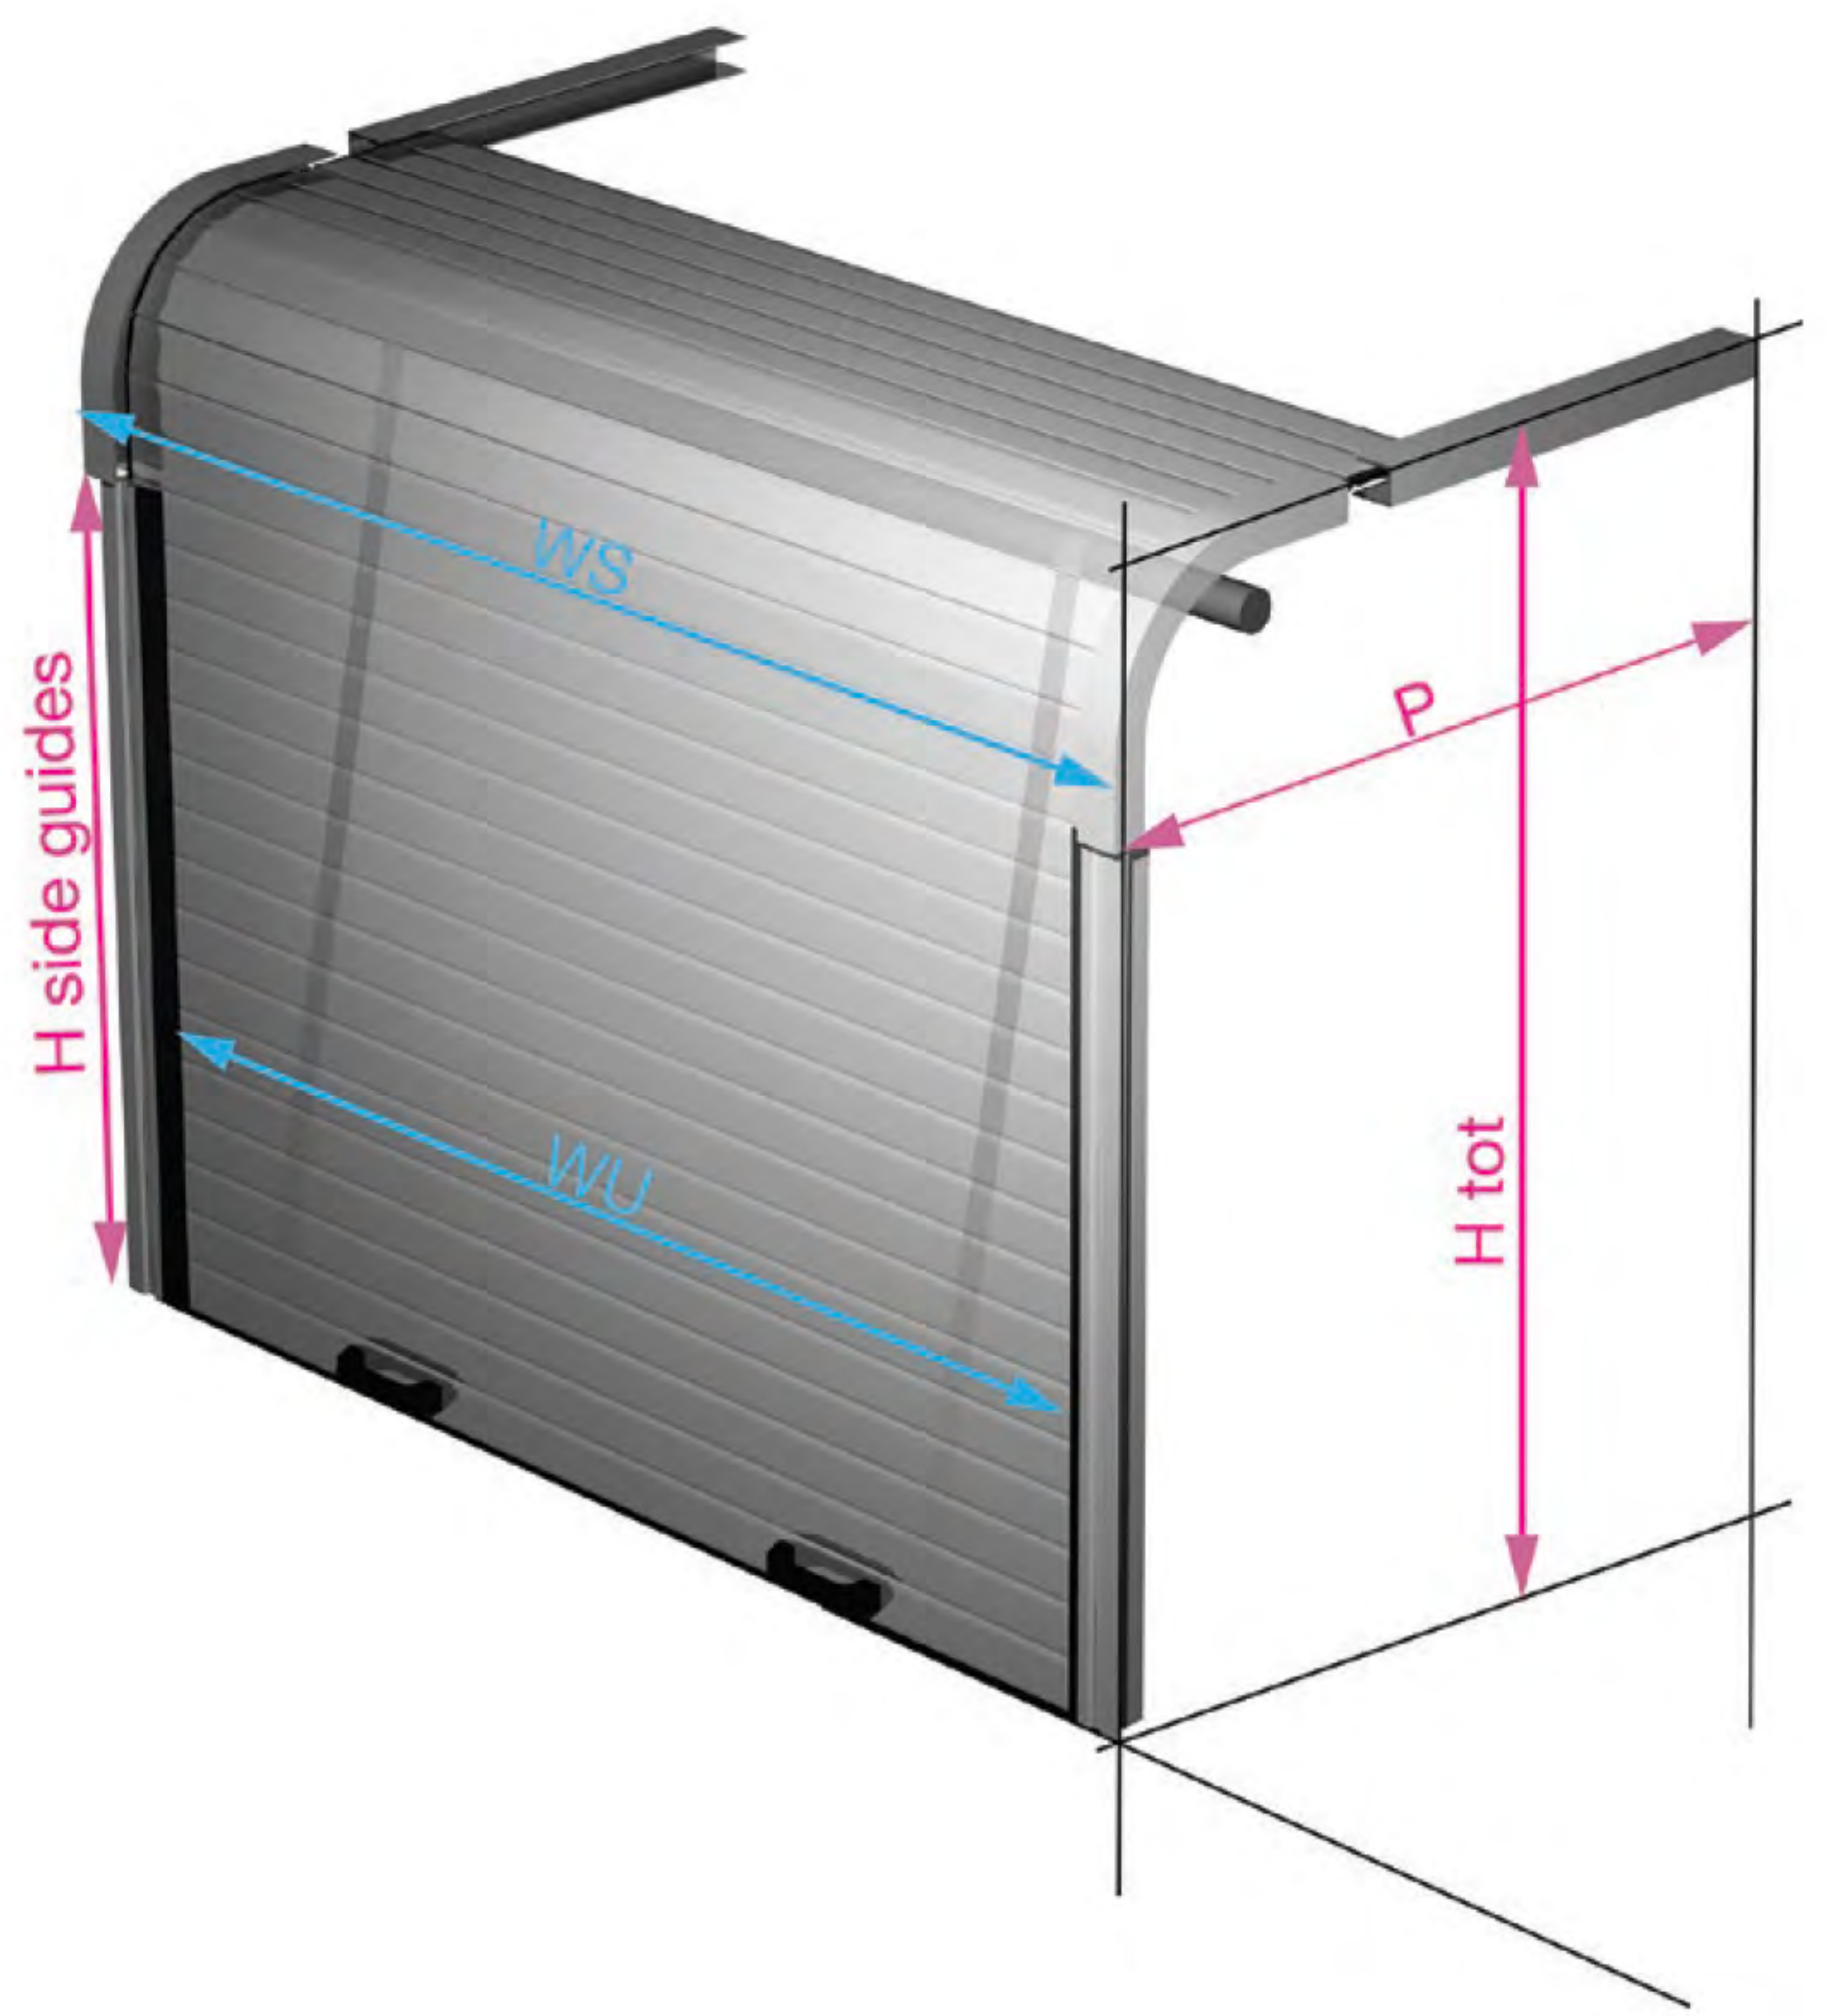

SRS ECO SIMPLY

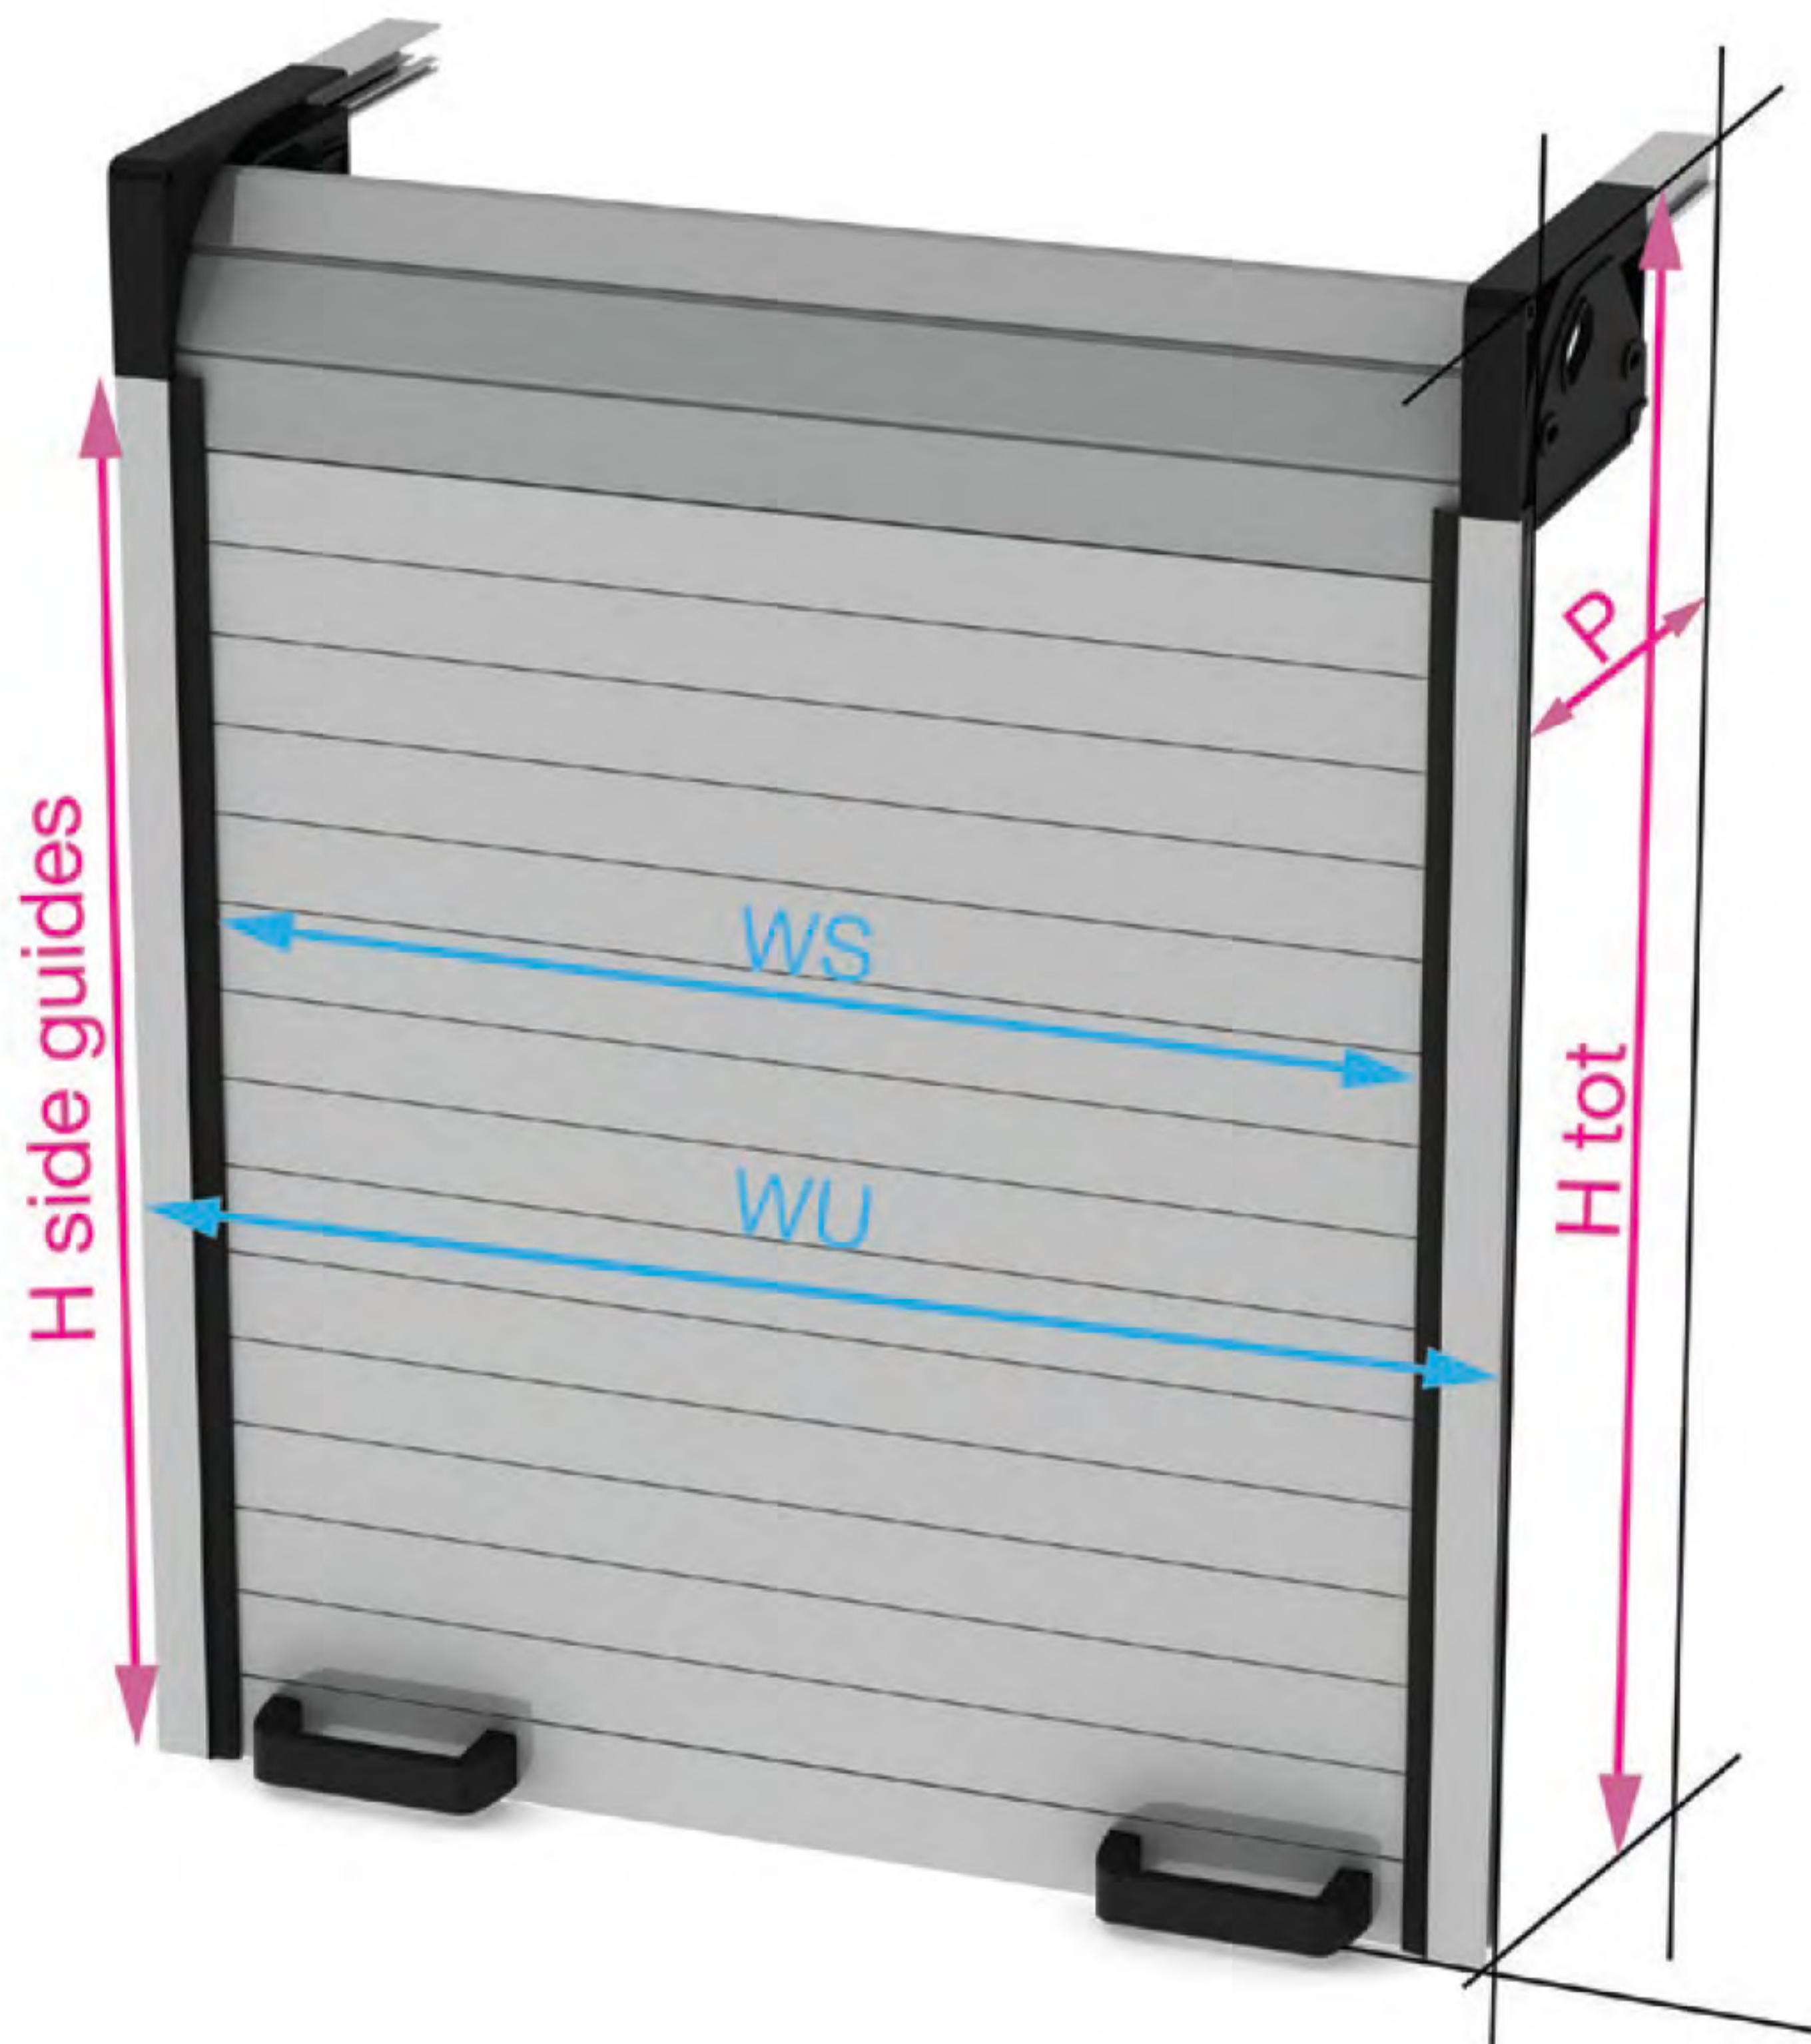

SRS ECO SIMPLY PLUS

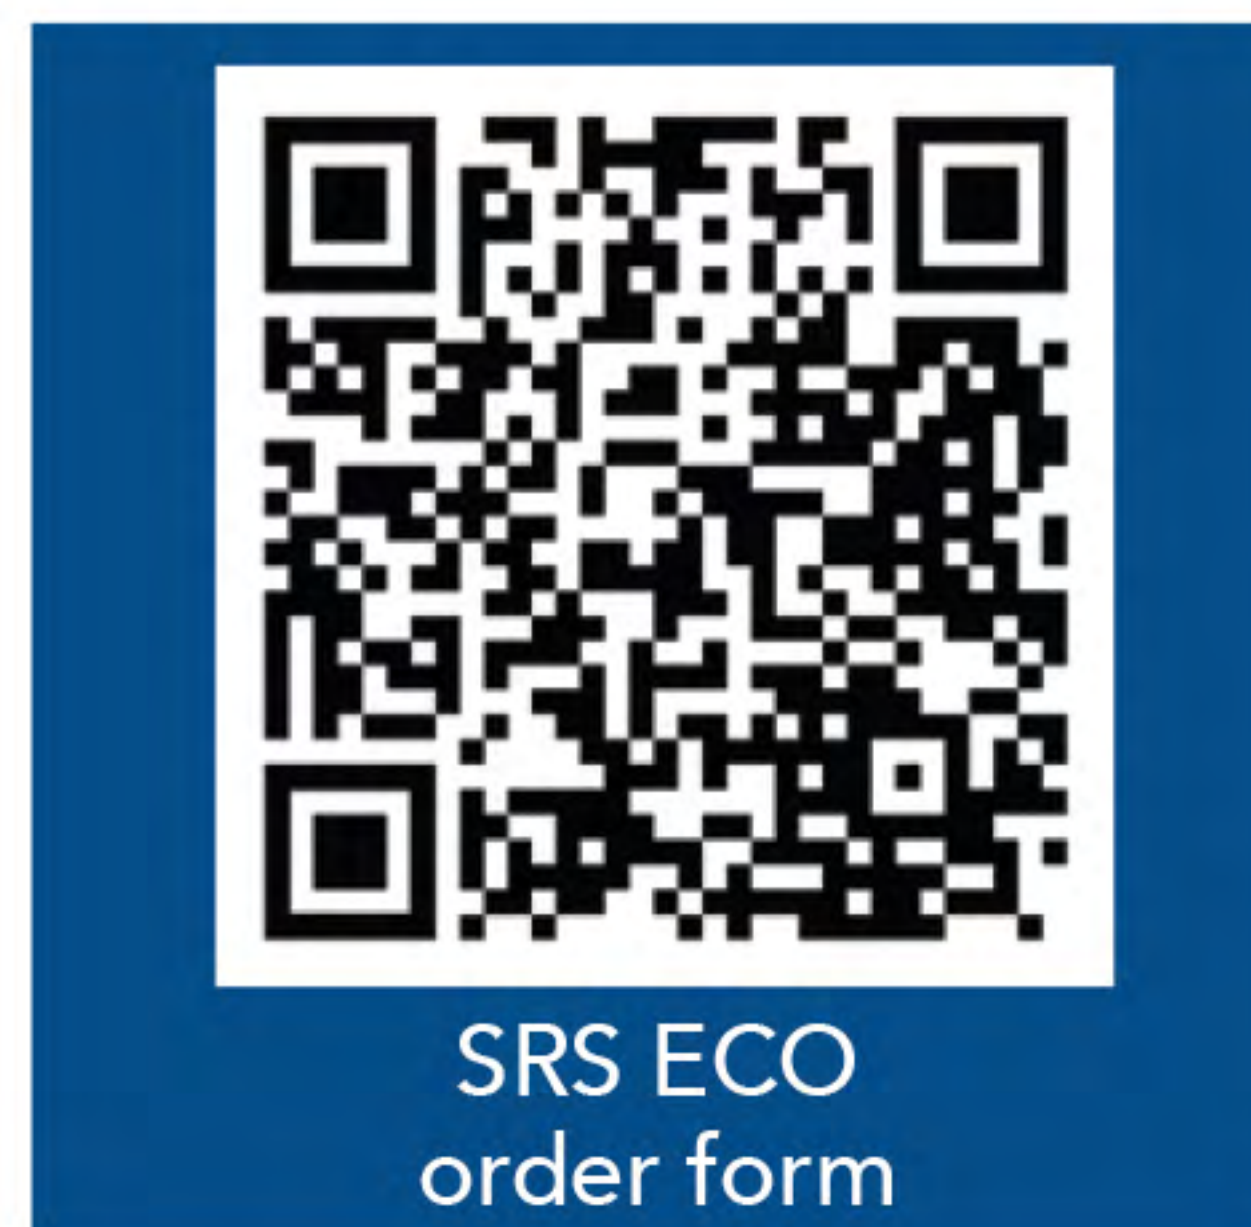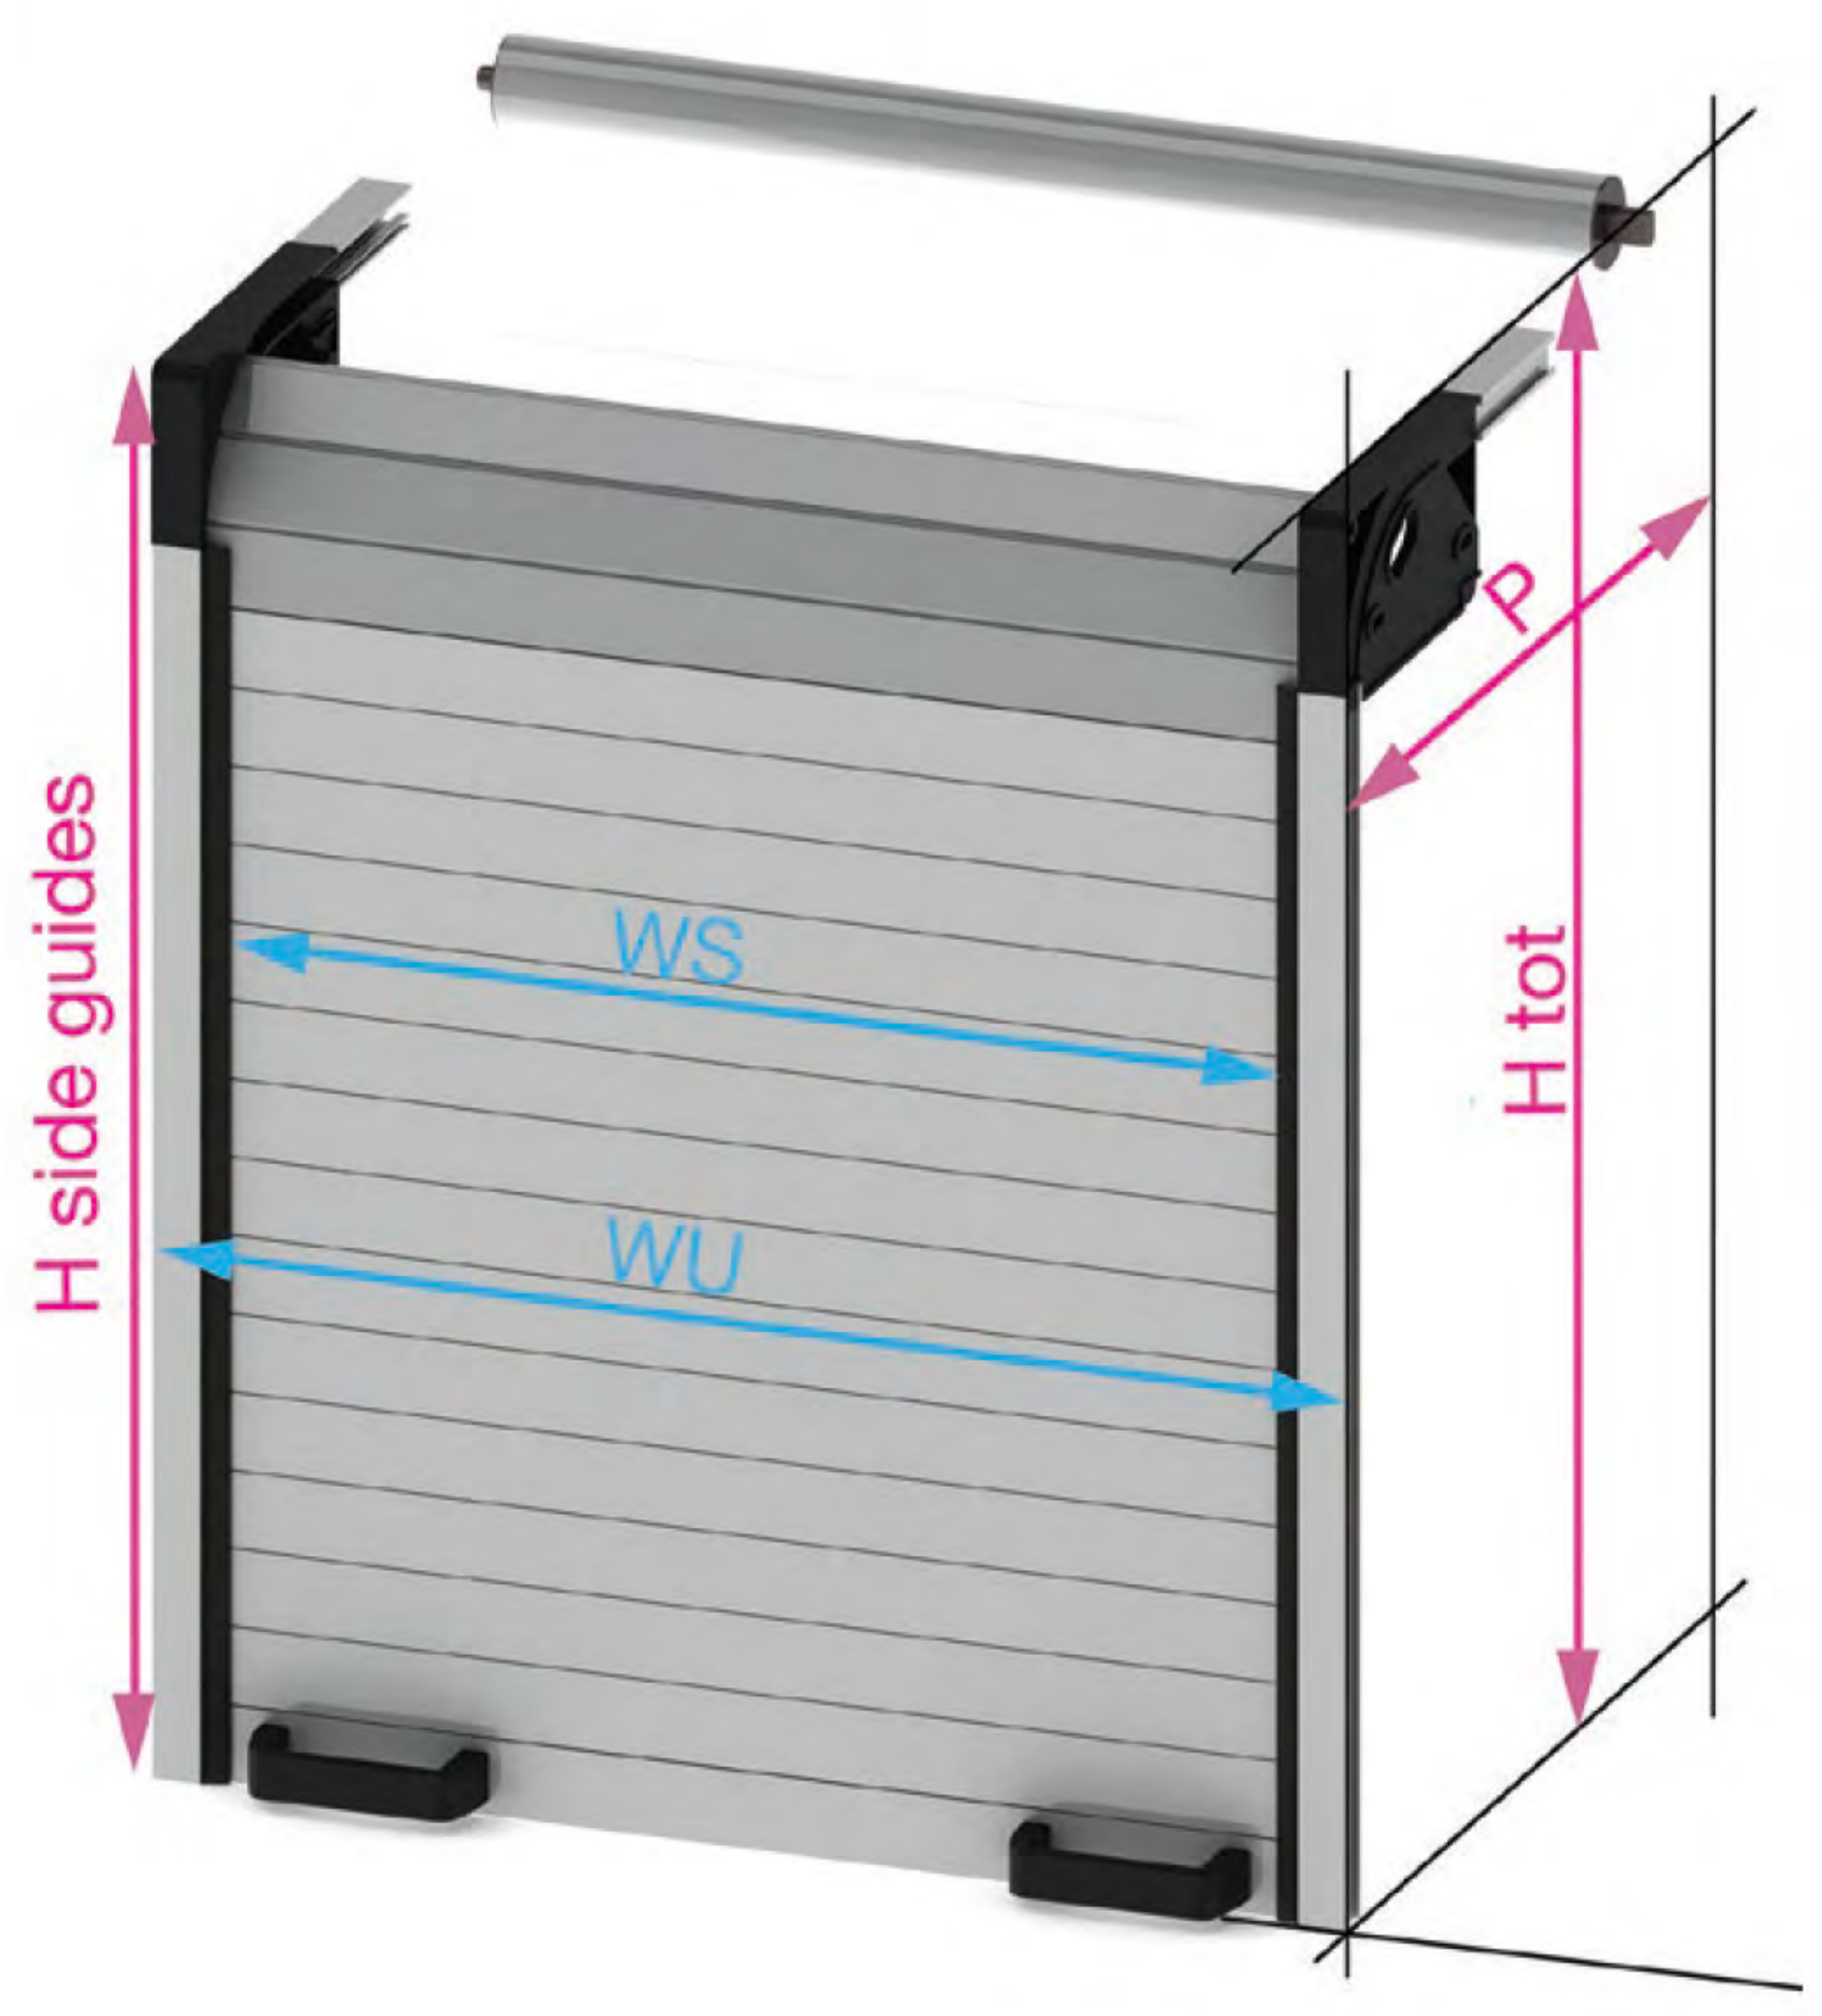



**SRS**<sup>®</sup>  
ROLLER SHUTTERS

Via B. Castelli, 44-46-48  
25010 Montirone (BS) Italia  
Tel. +39 030-2677496  
Fax +39 030-2170480

[www.serenaproduction.it](http://www.serenaproduction.it)  
[www.srs-shutters.com](http://www.srs-shutters.com)

Email: [sales@srs-shutters.com](mailto:sales@srs-shutters.com)  
[info@serenaproduction.it](mailto:info@serenaproduction.it)

 @Serenaproduction

 /company/serena-production/

FIRECO SRL  
Via E. Fermi, 56  
25064 GUSSAGO (BS)  
IT - ITALIA  
Tel.: +39 030 3733916  
Fax : +39 030 3733762  
[www.fireco.eu](http://www.fireco.eu)  
[info@fireco.it](mailto:info@fireco.it)

HISPAMAST, S.L.  
C/Estaño, 30  
28510 Campo Real  
ES - ESPAÑA  
Tel.: +34 918 733733  
Fax: +34 918 765141  
[www.hispamast.com](http://www.hispamast.com)  
[info@hispamast.com](mailto:info@hispamast.com)

EUROMAST S.A.R.L.  
Savoie hexapole,  
101 Rue Louis Armand, 73420 Mery  
FRANCE  
Tel.: +33 4 79349215  
Fax: +33 4 793492 16  
[www.euromast.fr](http://www.euromast.fr)  
[fireco@euromast.fr](mailto:fireco@euromast.fr)

FIRECO SYSTEMS N.V.  
Diestersteenweg 142  
3510 KERMT  
BE - BELGIUM  
Tel.: +32 11 851602  
Fax : +32 11 851604  
[www.fireco.be](http://www.fireco.be)  
[info@fireco.be](mailto:info@fireco.be)

FIRECO ASIA  
No. 9, Jalan TP 3/2 Taman  
Perindustrian UEP  
47620 SUBANG JAYA - MALAYSIA (MY)  
Tel.: +603 8011 2300  
Fax: +603 8812367  
[www.fireco-asia.com](http://www.fireco-asia.com)  
[gc@fireco-asia.com](mailto:gc@fireco-asia.com)

Fireco US  
1740 N. Gateway Boulevard  
Fresno, California 93727  
USA  
Tel.: +1 559 353-2823  
Fax: +1 559 255-7012  
[info@firecousa.com](mailto:info@firecousa.com)  
[www.firecousa.com](http://www.firecousa.com)